


STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

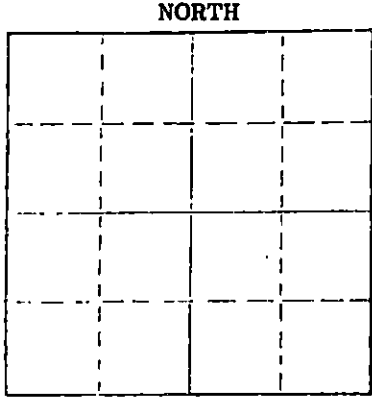

Locate well correctly on above Section Plot

Pawnee County. Sec. 10 Twp. 21S Rge. 16W (E2X) (W)
Location as "NE/CNW/SW4" or footage from lines C SW NE NE
Lease Owner Alpine Drilling Company, Inc.
Lease Name Boyd #1 Well No. 1
Office Address 800 Bitting Building, Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed September 16, 1976 19
Application for plugging filed September 15, 1976 19
Application for plugging approved September 15, 1976 19
Plugging commenced 1:00 AM, September 16, 1976 19
Plugging completed 3:30 AM, September 16, 1976 19
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo F. Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 382 1/2' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	1000'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy mud.
Heavy mud to 420', 40 sacks cement; 9-21-76
mud to 40', plug and solid bridge;
10 sacks to surface, 2 sacks in rathole.

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor STERLING DRILLING COMPANY
Address P. O. Box 129, Sterling, Kansas 67579

STATE OF KANSAS COUNTY OF RICE
F. A. Wuellner (employee of owner) or (owner or operator) of the above-described


well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God. STERLING DRILLING COMPANY

(Signature) F. A. Wuellner, Secretary
P. O. Box 129, Sterling, Kansas 67579

Subscribed and sworn to before me this 16th day of September 1976.

CHARLES HALL—NOTARY PUBLIC
My Commission Expires Jan. 6, 1978

Charles M. Hall, Notary Public.



STERLING DRILLING COMPANY
P. O. Box 129
Sterling, Kansas 67579

WELL LOG - - - - - BOYD #1
Located: SW NE NE, Section 10-21S-16W, Pawnee County,
Kansas

OWNER: Alpine Drilling Company, Inc.
ROTARY DRILLING CONTRACTOR: Sterling Drilling Company

COMMENCED: September 8, 1976
COMPLETED: September 16, 1976

TOTAL DEPTH: 3824'

<u>LOG</u>	<u>CASING RECORD</u>
0 - 68 Sand and Clay	Ran 24 joints 8 5/8", 8V, 28#, RGE #3, used casing, 989.26' set at 1000' K.B. with 450 sacks 50/50 Pozmix, 2% gel, 3% cc, 5% salt. Plug down at 9:00 AM, 9-9-76 by Allied.
68 - 425 Shale and Red Beds	
425 - 530 D-Sand	
530 - 815 Shale, Sand, Red Beds	
815 - 996 Red Beds and Shale	
996 - 1021 Anhydrite	
1021 - 1235 Shale	
1235 - 2045 Shale and Shale with lime streaks	
2045 - 3460 Lime and Shale	
3460 - 3650 Lime	
3650 - 3755 Lime and Shale	
3755 - 3798 Lime	
3798 - 3804 Lime, Shale, Arbuckle	
3804 - 3824 Arbuckle	