

STATE OF KANSAS
STATE CORPORATION COMMISSION


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212-North Market, Insurance Bldg.
Wichita, Kansas

WELL PLUGGING RECORD

Pawnee County, Sec. 1 Twp. 21 Rge. 16 (E) (W)

Location as "NE/CNW/SW" or footage from lines NE NE NE
Lease Owner Messman-Rinehart Oil Co.
Lease Name Phinney Well No. #1
Office Address 518 Petroleum Bldg., Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed _____ 19____
Application for plugging filed 9-6-61 19____
Application for plugging approved _____ 19____
Plugging commenced 9-8-61 19____
Plugging completed 9-10-61 19____
Reason for abandonment of well or producing formation Dry

NORTH

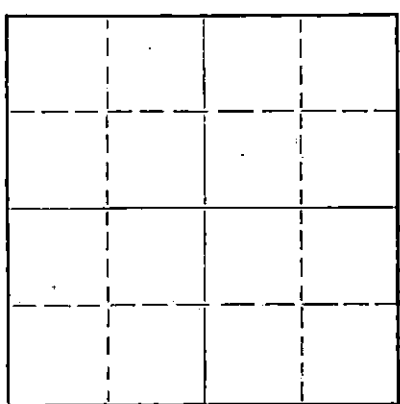

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? _____

Name of Conservation Agent who supervised plugging of this well Frank Broadfoot
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3810 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Sand to 3740' with 5 sacks cement
Mudded hole to 300', set 10' rock bridge with 20 sacks cement
Mudded hole to 35' set 10' rock bridge with 10 sacks cement.

RECEIVED
STATE CORPORATION COMMISSION
SEP 14 1961
9-14-61
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Southwest Casing Pulling Co., Inc.
Address Box 364, Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
Southwest Casing Pulling Co., Inc. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. C. Spencer Asst. Sec. - Treas.
Box 364, Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 12 day of Sept., 19 61

My commission expires 24 October 1964
Sidney D. Miller
Notary Public.



COMPLETION DATA

RECEIVED
 STATE CORPORATION COMMISSION
 OCT 10 1961
 CONSERVATION DIVISION
 Wichita, Kansas

Messman-Rinehart Oil Company
 No. 1 Phinney (Washdown)
 NE/4 NE/4 NE/4, Section 1-21s-16W
Pawnee County, Kansas

- 7/6/61 - Moved in rotary tools
- 7/7/61 - Washed hole down and found top five-inch casing at 2100 ft., washed over first joint and cut off, went back in with lead overshot and 5-1/2" casing and set over old 5-1/2" casing Pressured up to 500#, ran tubing in hole to 3800 ft. w/4-7/8" bit, found no bottom hole plug, pulled tubing and went in with Lane-Wells and set plug at 3792', ran correlation log and collar log (log indicated no perms. in Arbuckle)
- 7/11/61 - Perf. 3765-68' w/12^S and 3758-61' w/12^S, ran tubing, tore down and moved out (hole loaded).
- 7/12/61 - Moved in cable tools, treated with 500 gal. acid, started in formation @ 700#, increased to maximum of 1000#, dropped to 700# and finished at 675# at the rate of 25 gal/min., on vacuum in 3", swabbed hole down and had show gas
- 7/13/61 - Set overnight and fillup 1500 ft. water
- 7/14/61 - Swabbed down 1500 ft. in 1 1/2 hrs., next hr. swab 16 bbls. water, next hr. swab 12 bbls. wtr. (estimate 20,000 cfg too small to measure)
 Top Arbuckle 3752' - Water Analysis - Ph⁶, Grav. 1.045
 Chloride - 36.50
- 7/15/61 - Squeezed Arbuckle perms. with 35 sx. cement, pressured up to 3750#, W.O.C.
- 7/25/61 - Perf. 3753 1/2 w/1^S - no show
 Perf. 3754 w/1^S - no show
 Perf. 3754 1/2 w/1^S - no show
 Perf. 3755 w/1^S - no show
 Perf. 3755 1/2 w/1^S - no show
 Perf. 3756 w/1^S - no show
 Perf. 3757 w/1^S - no show
 Perf. 3762 w/1^S - no show
 Perf. 3763 w/1^S - no show
 Perf. 3764 w/1^S - no show
 Perf. 3771 w/1^S - no show
 Perf. 3772 w/1^S - no show
 Perf. 3773 w/1^S - no show
 Perf. 3774 w/1^S - no show
 Perf. 3775 w/1^S - no show
 Perf. 3780 w/1^S - no show
 Perf. 3780 1/2 w/1^S)
 Perf. 3781 w/1^S)
 Perf. 3781 1/2 w/1^S) Made 1 gal. oil
 Perf. 3782 w/1^S)
 Perf. 3783 w/1^S)
 Perf. 3784 w/1^S)
 Perf. 3785 w/1^S - no show
 Perf. 3786 w/1^S - no show

Completion Data - Page 2


Messman-Rinehart Oil Company
No. 1 Phinney (Washdown)
NE/4 NE/4 NE/4, Section 1-21S-16W
Pawnee County, Kansas

7/26/61 -- Treated w/500 gal. acid, Ga. 100,000 cfg., decreased to
50,000 cfg., swabbing 4 BWPB,

Preparing to abandon

MESSMAN-RINEHART OIL COMPANY

By:


Roger L. Messman

10/9/61

MESSMAN-RINEHART OIL COMPANY

518 PETROLEUM BUILDING

WICHITA, KANSAS

F0REST 3-4211

October 9, 1961

ROGER L. MESSMAN
C. B. RINEHART

RECEIVED
STATE CORPORATION COMMISSION
OCT 10 1961
CONSERVATION DIVISION
Wichita, Kansas

State Corporation Commission
Conservation Division
212 No. Market
Wichita, Kansas

Gentlemen:

We are enclosing herewith a copy of the Completion Data dated October 9, 1961, our Check No. 6288 in the amount of \$38.10, and the pink copy of your Invoice No. 3763-W, all covering the plugging of our No. 1 Phinney located in the NE NE NE, Section 1-21S, 16W, Pawnee County, Kansas.

This is a washdown of Bay and H.H.&B's No. 1 Wise and therefore, we do not have a well log available.

Yours very truly,

MESSMAN-RINEHART OIL COMPANY


C. B. Rinehart

CBR/bjs
Enc. (3)