


STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

Hodgeman County. Sec. 5 Twp. 21S Rge. 22WE7W  
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines

SE NW NE  
Lease Owner Buttonwood Petroleum, Inc.  
Lease Name Miller Well No. 1  
Office Address 9 East 4th St.-Suite 605, Tulsa, OK  
Character of Well (Completed as Oil, Gas or Dry Hole) 74103

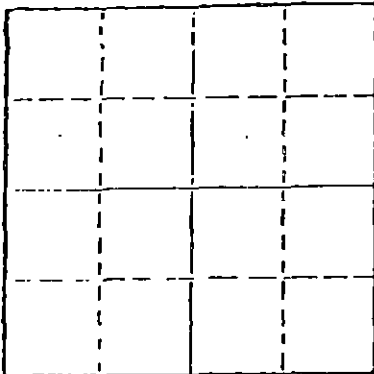

Locate well correctly on above  
Section Plot

Dry Hole  
Date Well completed October 27, 1980  
Application for plugging filed Verbal Application 19  
Application for plugging approved Verbal Approval 19  
Plugging commenced October 27, 1980  
Plugging completed October 27, 1980  
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Clarence Thomas  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 4,500'  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	424'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Filled hole with heavy rotary mud from 4,500 ft. (rotary total depth) to 900 ft. Set plug at 900 ft. and cemented with 60 sacks cement. Filled hole with heavy rotary mud from 900 ft. to 440 ft. Set plug at 440 ft. and cemented with 35 sacks cement. Filled hole with heavy rotary mud from 440 ft. to 40 ft. Set solid plug at 40 ft. and cemented to cellar with 10 sacks cement, 5 sacks cement in rat hole.

Plugging operations accomplished utilizing Sun Oil Well cementing pump truck through 4 1/2 inch drill pipe.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Sun Oil Well Cementing, Inc.  
Box 169, Great Bend, Kansas 67530

STATE OF Kansas COUNTY OF Sedgwick, ss.  
Dean Britting, Agent (Employer of owner) ~~xxxxxxxxxxxxxxxxxxxx~~


of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God

(Signature) Dean Britting  
251 N. Water #10, Wichita, Kansas 67202  
(Address)

SUBSCRIBED AND SWORN TO before me this 7th day of November, 1980

My commission expires July 25, 1982

Elsie Willison  
Notary Public



11-19-80

