

STATE OF KANSAS
STATE CORPORATION COMMISSION


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Pawnee County, Sec. 13 Twp. 21 Rge. 15W (E) (W)

Location as "NE/CNW/SW" or footage from lines NE NE NE
Lease Owner Dunne-Gardner Petroleum, Inc.
Lease Name Converse Well No. 1
Office Address 300 Schweiter Bldg., Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 7-25 1968
Application for plugging filed 7-25 1968
Application for plugging approved 7-25 1968
Plugging commenced 7-25 1968
Plugging completed 7-25 1968
Reason for abandonment of well or producing formation _____

NORTH

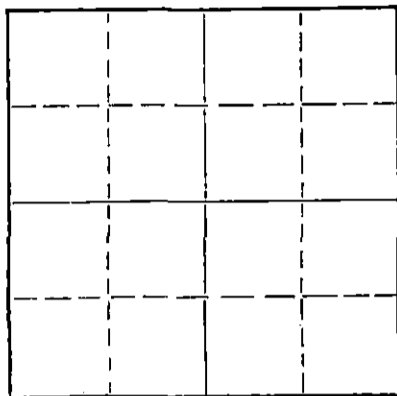

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3775 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	924'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Mud to 300', plug, 4 sacks hulls 25 sacks cement
Mud to 40', plug, 4 sacks hulls, 8 sacks cement
2 sacks cement in rathole

7-30-68

RECEIVED
STATE CORPORATION COMMISSION
JUL 30 1968
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor company tools
Address _____

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Don Gardner (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
300 Schweiter Building, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 25th day of July, 19 68

My commission expires December 14, 1969
[Signature] Notary Public.

RECEIVED
STATE CORPORATION COMMISSION
AUG 20 1968
CONSERVATION DIVISION
Wichita, Kansas

DRILLERS' LOG

#1 CONVERSE
NE NE NE Section 13-21-15W
Pawnee County, Kansas

OPERATOR: Dunne-Gardner Petroleum, Inc.
300 Schweiter Building
Wichita, Kansas

CONTRACTOR: Dunne-Gardner Petroleum, Inc.

COMMENCED: July 18, 1968

COMPLETED: July 25, 1968

CASING RECORD: 8-5/8" @ 924' w/215 sacks Pozmix & 200 common

<u>FROM</u>	<u>TO</u>	<u>DESCRIPTION</u>
0	150	Sand and clay
150	348	Blue shale
348	450	Sand
450	850	Red Bed and shale
850	931	Anhydrite
931	2235	Shale and lime
2235	2448	Lime
2448	3412	Lime and shale
3412	3440	Lime
3440	3482	Lime and shale
3482	3632	Lime
3632	3680	Lime and shale
3680	3709	Chert
3709	3775	Shale and lime
3775		Rotary Total Depth

STATE OF KANSAS)
) ss
COUNTY OF SEDGWICK)


I hereby certify that the above is a true and correct log to the best of my knowledge and belief.

DUNNE-GARDNER PETROLEUM, INC.


Jack D. Dunne

Subscribed and sworn to before me this 31st day of July, 1968.

My commission expires:
December 14, 1969


Notary Public