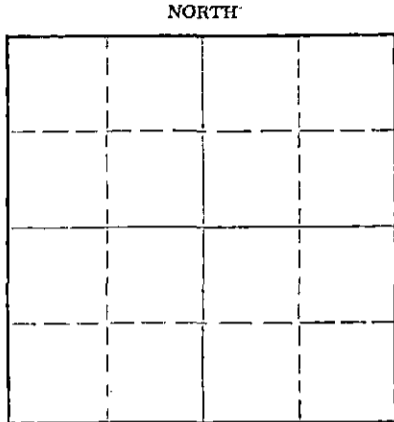


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD



Locate well correctly on above
Section Plat

Pawnee County, Sec. 2 Twp. 21 S Rge. 16 W (E) (W)
Location as "NE/CNW/SW" or footage from lines NW SE NE
Lease Owner ALPINE OIL & ROYALTY CO., INC.
Lease Name Sam Kindsvater Well No. 2
Office Address 800 Bitting Building, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) oil well
Date well completed July 17, 1963 19
Application for plugging filed October 8, 1965 19
Application for plugging approved October 8, 1965 19
Plugging commenced October 12, 1965 19
Plugging completed October 14, 1965 19
Reason for abandonment of well or producing formation non-productive in commercial quantities
If a producing well is abandoned, date of last production September 30 1965
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation Arbuckle Depth to top 3771 Bottom Total Depth of Well 3790 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	1022'	cemented
				5 1/2"	3780'	3094'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled with sand from 3790 feet to 3770 feet. Ran 4 sacks of cement from 3770 feet to 3745 feet. Pumped 14 sacks of mud at 700 feet. Pulled pipe to 400 feet and pumped 20 sacks of cement. Pulled pipe to 200 feet and pumped 20 sacks of cement. Pumped 10 sacks of cement from 30 feet to base of cellar.

10-20-65

RECEIVED
STATE CORPORATION COMMISSION

OCT 20 1965

CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor Glenn & Smith Pipe Pulling Co.
Address Ellinwood, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
Dwight J. Wilson (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *Dwight J. Wilson*
800 Bitting Building, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 19th day of October 19 65

My commission expires August 10, 1969

Virginia Mundell
Virginia Mundell Notary Public.

WELL LOG

ALPINE OIL & ROYALTY CO., INC.

Commenced: June 29, 1963

Contractor: Quaker Drilling Co., Inc.

Completed: July 11, 1963

No. 2 Sam Kindsvater
 NW SE NE Sec. 2-21S-16W
 Pawnee County, Kansas

Elevation: 2003 K. B.

Casing Record:

8 5/8" casing set at 1022 feet with 475 sacks cement
 5 1/2" casing set at 3780 feet with 100 sacks cement

RECEIVED
 STATE CORPORATION COMMISSION

OCT 8 1965

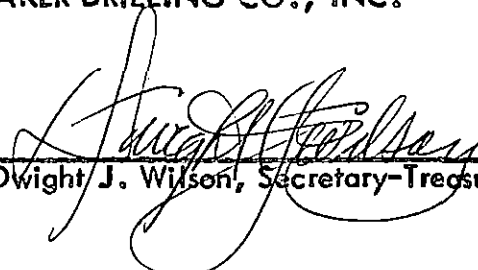
(Figures Indicate the Bottom of the Formations)

CONSERVATION DIVISION
 Wichita, Kansas

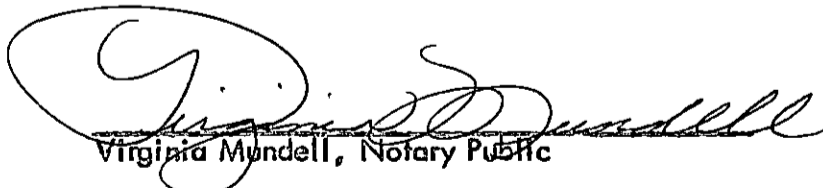
<u>FORMATION</u>	<u>DEPTH</u>	<u>FORMATION TOPS</u>	
Surface Soil and Clay	70	Anhydrite	1012 + 991
Shale and Shells	440	Heebner	3342 - 1339
Dakota Sand	560	Brown Lime	3435 - 1432
Shale and Shells	595	Lansing-Kansas City	3446 - 1443
Shale	700	Base of Kansas City	3684 - 1681
Red Bed	1012	Viola	3699 - 1696
Anhydrite	1040	Simpson Shale	3742 - 1739
Shale and Shells	1500	Arbuckle	3771 - 1768
Shale	1780	Rotary Total Depth	3790 - 1787
Lime and Shale	3270		
Lime	3740		
Lime and Shale	3790		

We hereby certify the foregoing to be a true and correct copy of the driller's log of the well drilled in the NW SE NE of Section 2, Township 21 South, Range 16 West, Pawnee County, Kansas.

QUAKER DRILLING CO., INC.

By: 
 Dwight J. Wilson, Secretary-Treasurer

SUBSCRIBED AND SWORN TO before me a Notary Public in and for Sedgwick County, Kansas this 8th day of October, 1965.


 Virginia Mundell, Notary Public

MY COMMISSION... EXPIRES:

August 10, 1969.