

Give All Information Completely
Make Required Affidavit
Make or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

Barton County. Sec. 8 Twp. 16 Rge. 12 (E) (W)

Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines. NW NE NW

Lease Owner The Phil-Han Oil Company

Lease Name Staudinger Well No. 1 "C"

Office Address 1407 Union National Bank Building, Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) dry hole

Date well completed November 24, 1947 19

Application for plugging filed " 19

Application for plugging approved " 19

Plugging commenced " 19

Plugging completed " 19

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Durkee

Producing formation Depth to top Bottom Total Depth of Well 3340 Feet

Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8 5/8"	550'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled with heavy mud to bottom of surface pipe.
Bridged hole at 540' and cemented with 15 sacks;
set bridge at 40' and cemented with 10 sacks.

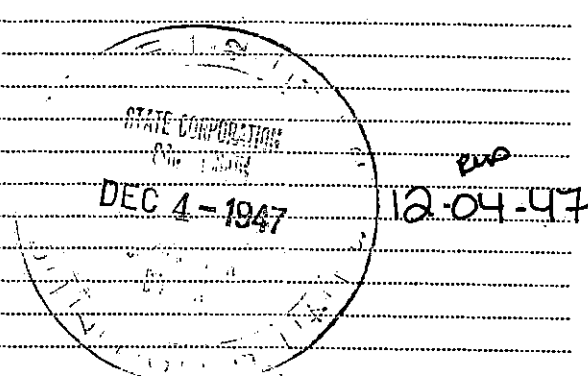

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to The Phil-Han Oil Company
Address 1407 Union National Bank Bldg., Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.

Perry R. Hanson (employee of owner) or (owner or operator) of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature) Perry R. Hanson

(Address)

SUBSCRIBED AND SWORN to before me this 24th day of December, 1947.

Walter A. Stemberg
Notary Public.

My commission expires October 4, 1949.



STAUDINGER #1 "C"
THE PHIL-HAN OIL COMPANY

NW NE NW Section 8-16-12W
Barton County, Kansas

Comm: 11-13-47
Comp: 11-24-47

Production - Dry

shale, soil & shells	100
sand, shale & shells	440
shale	550
red rock	817
annhydrite	838
shale & shells	1060
salt	1180
shale & shells	1550
lime	1925
lime & shale	2005
lime	2105
lime & shale	2255
shale & shells	2490
shale & lime	2685
lime	2975
shale & shells	3065
lime	3295
lime & conglomerate	3330
conglomerate	3340

T.D.

CASING RECORD:
550' of 8 5/8" surface casing
cemented w/200 sacks.

STATE OF KANSAS)
) SS
SEDGWICK COUNTY)

We hereby affirm that the above and foregoing is a true and correct copy of the log of the #1 STAUDINGER "C", located in the NW NE NW of Section 8-16-12W, Barton County, Kansas.

THE PHIL-HAN OIL COMPANY

By

Larry R. Hanson

Subscribed and sworn to before me, this 3rd day of December, 1947.

Nelle A. Stemberg
Notary Public

My com. expires Oct. 4, 1949.

PLUGGING
FILE SEC 8 T 16 R 170
BOOK PAGE 2 LINE 23