


15-009-22383-0000

STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

Barton County, Sec. 8 Twp. 16 Rge. 12 /E/W  
Location as "NE/CNW 1/4 SW 1/4" or footage from lines \_\_\_\_\_  
110'S of NE SW  
Lease Owner Valley Oil, Inc.  
Lease Name Luerman Well No. 1  
Office Address 1017 Harrison St., Great Bend, KS 67530  
Character of Well (Completed as Oil, Gas or Dry Hole) \_\_\_\_\_

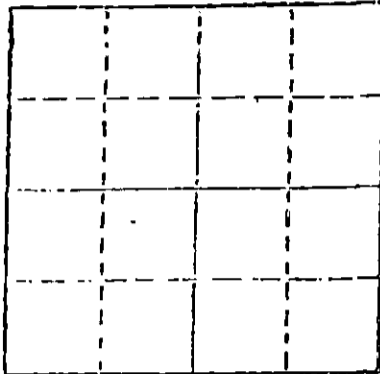

Locate well correctly on above  
Section Plot

Dry Hole  
Date Well completed \_\_\_\_\_ 6-2 1981  
Application for plugging filed \_\_\_\_\_ 6-2 1981  
Application for plugging approved \_\_\_\_\_ 6-2 1981  
Plugging commenced \_\_\_\_\_ 6-2 1981  
Plugging completed \_\_\_\_\_ 6-2 1981  
Reason for abandonment of well or producing formation \_\_\_\_\_

Dry Hole  
If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Marion Schmidt  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well \_\_\_\_\_  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	296'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Mud laden fluid 3369' - 540'  
50 sks cement @ 540'  
30 sks cement @ 300'  
10 sks cement @ 30'  
10 sks cement in rat hole.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Emphasis Oil Operations

STATE OF KANSAS COUNTY OF RUSSELL, ss.  
Joe K. Branum (employee of owner) or (owner or operator)  
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Joe K. Branum  
P. O. Box 506, Russell, KS 67665  
(Address)

SUBSCRIBED AND SWORN TO before me this 4th day of June, 1981.

My commission expires February 6, 1984.

Glenda R. Tiffin  
Notary Public.



06-08-81

EMPHASIS OIL OPERATIONS  
P. O. Box 506  
Russell, Kansas 67665

RECEIVED  
STATE CORPORATION COMMISSION

JUN - 8 1981

CONSERVATION DIVISION  
Wichita, Kansas

DRILLERS LOG

OPERATOR: Valley Oil, Inc.  
1017 Harrison Street  
Great Bend, Kansas 67530

CONTRACTOR: Emphasis Oil Operations  
P. O. Box 506  
Russell, Kansas 67665

LEASE: Luerman WELL: #1

LOCATION: 110'S of NE SW  
Section 8-16S-12W  
Barton County, Kansas

Total Depth: 3369'

Elevation:

Commenced: 5-27-81

Completed: 6-2-81

Casing: 8-5/8" @ 296' with 175 sks cement

Status: Dry Hole

DEPTHS & FORMATIONS

(All measurements from K.B.)

Top Soil & Sand	30'	Shale & Lime	2750'
Sand & Red Bed	300'	Shale	2760'
Sand & Shale	810'	Shale & Lime	3067'
Anhydrite	834'	Lime & Shale	3138'
Shale	1715'	Lime	3208'
Shale & Lime	2055'	Lime & Shale	3277'
Shale	2300'	Lime (R.T.D.)	3369'

STATE OF KANSAS )  
                  ) ss:  
COUNTY OF RUSSELL)


I, Joe K. Branum, of Emphasis Oil Operations, state that the above and foregoing is a true and correct log of the above captioned well.

  
Joe K. Branum

Subscribed and sworn to before me this 4th day of June, 1981.

My Commission Expires: February 6, 1984.



  
Notary Public