

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-185-31459-00-00
Spot: SENWSE Sec/Twnshp/Rge: 19-23S-14W
1650 feet from S Section Line, 1650 feet from E Section Line
Lease/Unit Name: KACHELMAN Well Number: 2
County: STAFFORD Total Vertical Depth: 4050 feet

Operator License No.: 3911
Op Name: RAMA OPERATING CO., INC.
Address: 101 S. MAIN
STAFFORD, KS 67578

Production Casing Size: 5.5 feet: 4049 WITH 150 SX CMT
Surface Casing Size: 8.625 feet: 274 WITH 200 SX CMT

131 63

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 06/17/2003 10:00 AM

Plug Co. License No.: 31529 Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.

Proposal Rcvd. from: MONTE ANDREWS Company: MIKE'S TESTING & SALVAGE, INC Phone: (620) 938-2537

Proposed Plugging Method: SAND TO 3650' & 5 SX CMT. PLUG AT 900' WITH 10 SX GEL - 100# HULLS - 50 SX CMT. PLUG AT 300' W TIH 100# HULLS - 50 SX CMT. PLUG AT 40' WITH 20 SX CMT.

Plugging Proposal Received By: RICHARD LACEY

Witness Type: Plugging Operations 100% Witnessed (Complete)

Date/Time Plugging Completed: 06/17/2003 11:55 AM

KCC Agent: RICHARD LACEY

Actual Plugging Report:

PERFS AT 3706-10'. SANDED TO 3650' & 5 SX CMT. RAN TUBING TO PLUG THROUGH. 1ST PLUG AT 900' WITH 10 SX GEL - 100# HULLS - 50 SX CMT. 2ND PLUG AT 300' WITH 100# HULLS - 50 SX CMT. 3RD PLUG AT 40' WITH 20 SX CMT. GOOD CIRCULATION.

RECEIVED

JUN 24 2003

KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED. RECOVERED 1837' OF 5 1/2" CASING.



Plugged through: CSG

District: 01

Signed

Richard M. Lacey

(TECHNICIAN)

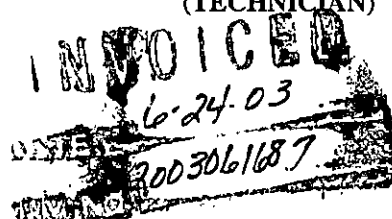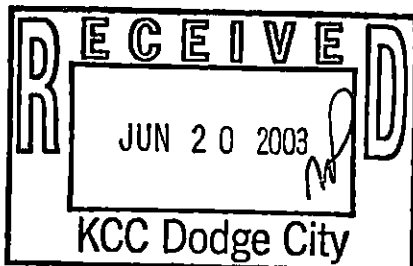

Form 2/3