

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
1110 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

PAWNEE County, Sec. 22 Twp. 21 Rge. 16W (X) (W)

Location as "NE/CNW/SE" or footage from lines SE SE SE

Lease Owner PETROLEUM, INC.

Lease Name HUNSLEY Well No. 1

Office Address ROUTE 2, GREAT BEND, KANSAS

Character of Well (completed as Oil, Gas or Dry Hole) OIL

Date well completed SEPTEMBER 22, 19 53

Application for plugging filed MARCH 15, 19 62

Application for plugging approved MARCH 30, 19 62


Plugging commenced MARCH 31, 19 62

Plugging completed APRIL 6, 19 62

Reason for abandonment of well or producing formation DEPLETION OF PRODUCIBLE FORMATIONS

If a producing well is abandoned, date of last production DECEMBER 9, 19 61

Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

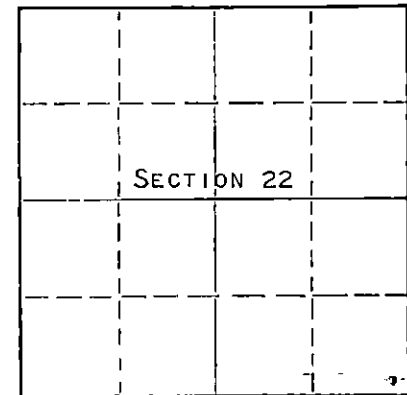

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well W. L. LACKAMP, JR.

Producing formation ARBUCKLE Depth to top 3862' Bottom 3866' Total Depth of Well 3866' Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
ARBUCKLE	WATER AND LITTLE OIL	3862	3866	8-5/8" 5-1/2"	983' 3862'	NONE 3307'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

FILLED HOLE WITH CRUSHED ROCK FROM 3866' TO 3840'. PLACED 4 SACKS CEMENT ONTO CRUSHED ROCK. MUDDING UP WITH HEAVY MUD TO 300' AND BUILT SOLID ROCK BRIDGE AT 300'. FILLED TO BASE OF WELL CELLAR WITH READY MIX CONCRETE.

RECEIVED  
STATE CORPORATION COMMISSION

APR 13 1962

CONSERVATION DIVISION  
Wichita, Kansas

4-16-62

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor MORGAN WELL PLUGGING CONTRACTOR  
Address 102 WEST 18TH STREET, HUTCHINSON, KANSAS

STATE OF KANSAS, COUNTY OF BARTON, ss.  
DON SEARLE (employee of owner) or (owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Don Searle  
ROUTE 2, GREAT BEND, KANSAS  
(Address)

SUBSCRIBED AND SWORN TO before me this 11TH day of APRIL, 19 62

My commission expires APRIL 14, 1963. Notary Public.

DRILLER'S LOG HUNSLEY NO. 1

Petroleum, Inc., Operator  
 Garvey Drilling Company, Contractor  
 Drilling Commenced: August 31, 1953  
 Drilling Completed: September 12, 1953  
 Casing Record: 8 5/8" @ 983' w/500 sax  
 5 1/2" @ 3862 1/2' w/50 sax

Section 22, Twp. 21S, Rge. 16W  
 Location: SE SE SE  
 County: Pawnee County, Kansas  
 Production: Arbuckle  
 R.T.D.: 3866'

Figures below indicate bottom of formation:

100	Sand
175	Sand & Shale Streaks
422	Shale & Red Bed
510	Sand
720	Shale & Shells
830	Shale & Red Bed
977	Red Shale & Shells
983	Anhydrite
1012	Anhydrite
1650	Shale & Shells
3320	Shale & Lime
3866	Lime
3866	R.T.D.

Tops:

Heebner:	3381 (-1397)
Brown Lime:	3477 (-1493)
Lansing:	3489 (-1505)
Viola:	3756 (-1772)
Simpson:	3798 (-1814)
Arbuckle:	3862 (-1878)

RECEIVED  
 STATE CORPORATIONS COMMISSION

APR 1 1962

CONSERVATION DIVISION  
 Wichita, Kansas

I hereby certify that this is a true and correct log of the above mentioned well.

PETROLEUM, INC.

By W. W. White

STATE OF KANSAS )  
 ) SS:  
 COUNTY OF SEDGWICK)

Subscribed to and sworn to before me, a Notary Public, in said County and State, this 16th day of September, 1953.

Charlotte Heebner  
 Notary Public

My commission expires: October 13, 1954