


WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bitting Building  
Wichita, Kansas

NORTH

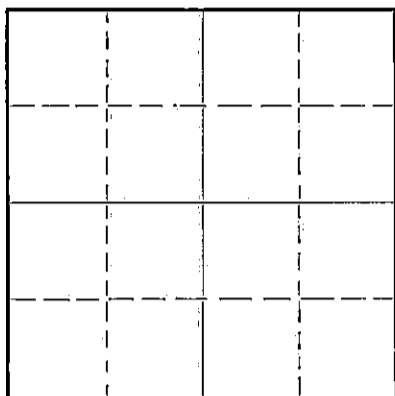

Locate well correctly on above Section Flat

Barton County, Sec. 9 Twp. 16 Rge. (E) 12 (W)  
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines SEC  
Lease Owner D. R. Lauck Oil Company Inc.  
Lease Name Mans Well No. 1  
Office Address Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) oil  
Date well completed Dec. 16 19 49  
Application for plugging filed Apr. 15 19 50  
Application for plugging approved Apr. 15 19 50  
Plugging commenced Apr. 15 19 50  
Plugging completed Apr. 19 19 50  
Reason for abandonment of well or producing formation depleted  
If a producing well is abandoned, date of last production Apr. 10 19 50  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Stoge  
Producing formation Lansing Depth to top 3081 Bottom 3094 Total Depth of Well 3374 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Lansing	Oil & Water	3081	3094	10" 5"	228 3373	none 2637

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

cement 3374 - 3329  
mud 3329 - 3075  
cement 3075 - 3040  
mud 3040 - 228  
bridge 228 - 220  
cement 220 - 180  
mud 180 - 30  
cement 30 - 6 to bottom of cellar

4-27-50

APR 22 1950

(If additional description is necessary, use BACK of this sheet)


Correspondence regarding this well should be addressed to  
Address D. R. Lauck Oil Company Wichita Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.  
P. R. Bishop (employee of owner) or (owner or operator) of the above-described well,  
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *P. R. Bishop*  
Wichita, Kansas  
(Address)

SUBSCRIBED AND SWORN to before me this 27 day of April, 19 50  
*Elizabeth Kay*  
Notary Public.

My commission expires Sept. 14, 1951



15-009-19323-00-00

D. R. LAUCK OIL COMPANY INC.

Mans No.1

Sec. 9. Twp.16s. R 12W  
SEc *Barton County*

Commenced Nov.30 1949

Completed Dec.16, 1949

Casing:

10" 229 cemented 165 sacks  
5" 3375 cemented 125 "

shale	175
sand	190
shale & shells	440
Pyrite & Lime	500
shale & shells	580
shale & red rock	610
Anhydrite	835
shale & shells	1090
salt & shale	1230
shale & shells	1525
shale & lime	2700
lime	3342
conglomerate	3376

Tops- derrick floor

Lane-Wells

Heebner	2974	2976
Brown lime	3065	3065
White lime	3080	3081
Conglomerate	3340	
Total Depth	3374	
plug back	3329	3329

Drill stem test:

1 hr.20' oil cut mud

Perforated:

3081-86 24 shots  
3090-94 24 shots

1000 acid  
2500 acid

Estimate 50 bbls.

*Faint illegible stamp*

APR 27 1950

STATE OF OREGON  
COUNTY OF CLATSOP  
1950

**PLUGGING**  
 FILE SEC 9 T 16 R 12W  
 BOOK PAGE 1 LINE 41