


Give All Information Completely
Make Required Affidavits
Mail or Deliver Request for
Conservation Division
State Corporation Commission
312 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

Pawnee County, Sec. 35 Twp. 21 Rge. 16 (E) (W)

Location as "NE/CNWSW" or footage from logs SE SW SE
Lessor Owner Mull Drilling Company, Inc.
Lessee Name Prosser Well No. B-4
Office Address P. O. Box 349 Russell, Kansas 67665
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed 12-21-70 19
Application for plugging approved 12-22-70 19
Plugging commenced 1-15-71 19
Plugging completed 2-15-71 19
Reason for abandonment of well or producing formation
If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

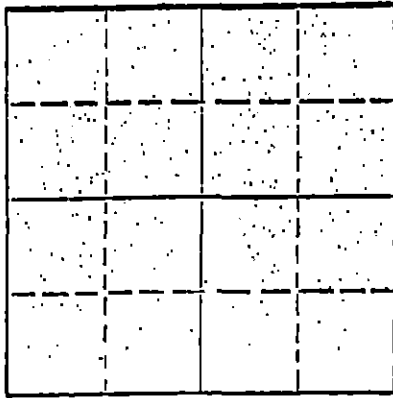

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation Depth to top Bottom Total Depth of Well 4184 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				10 3/4	857	None
				5 1/2	4114	2877'.01

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Unpacked braden head and found water flowing out of surface casing. Installed 10 3/4" X 5 1/2" control head. Pushed a plug to 3750' and dumped 20 gallons of sand, and 5 sacks of cement. Shot casing at 2898'. Laid down 92 joints of 5 1/2" casing. Squeezed well with 2 sacks of hulls, 30 sacks of gel and 140 sacks of 50/50 pozmix cement with 6% gel added.

RECEIVED
STATE CORPORATION COMMISSION
FEB 26 1971
CONSERVATION DIVISION
Wichita, Kansas

2-26-71


(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Forbes Casing Pulling Company, Inc.
Address P. O. Box 221 Great Bend, Kansas 67530

STATE OF Kansas COUNTY OF Barton, ss.
James W. Rockhold (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James W. Rockhold
P. O. Box 221 Great Bend, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 24 day of February, 1971

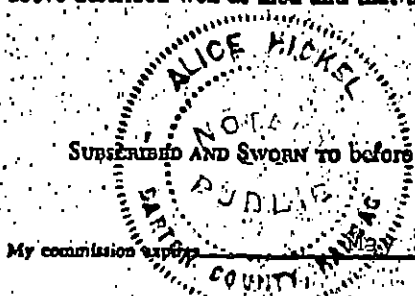

(Signature) Notary Public

Well #4 - Prosser "B"
SE SW SE of Section 35-21S-16W
Pawnee County, Kansas

Work Commenced August 4, 1953
Drilling commenced August 4, 1953
Drilling Completed August 22, 1953
Completed August 23, 1953

Well Log

Sand & Shale	0 to 365
Red Bed	365 to 418
Sand	418 to 515
Blue Shale	515 to 782
Red Bed	782 to 857
Shale	860 to 960
Anhydrite	960 to 995
Shale	995 to 1146
shale & shells	1146 to 2100
Shale & Lime	2100 to 2890
Shale	2890 to 2945
Shale & Lime	2945 to 3250
Shale	3250 to 3295
Shale & Lime	3295 to 3505
Lime	3505 to 3557
Shale & Lime	3557 to 3880
Sand	3880 to 3915
Lime	3915 to 4057
Lime & Shale	4057 to 4138
Lime	4138 to 4184 TD

Casing Record

860' 10-3/4" 32.75# SS Casing
cemented w/ 425 sax cement

4184' - 5-1/2" OD 14# J-55 SS Casing
cemented w/ 225 sax cement

RECEIVED
STATE CORPORATION COMMISSION
DEC 23 1970
CONSERVATION DIVISION
Wichita, Kansas