


STATE OF KANSAS  
STATE CORPORATION COMMISSION  
Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

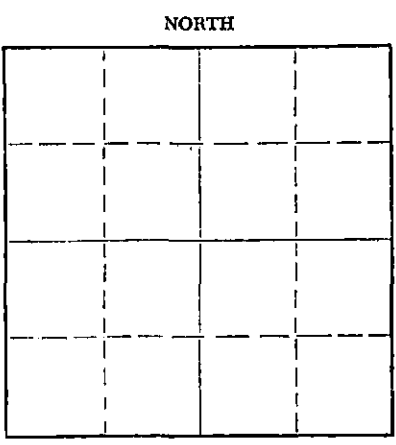

Locate well correctly on above Section Plat

Palmer County, Sec. 26 Twp. 21S Rge. 16 (E) (W)X  
Location as "NE/CNW/SW" or footage from lines NW 11  
Lease Owner S. L. Reeves  
Lease Name G. Brooks Well No. 1  
Office Address P. O. Box 94061 Oklahoma City, Oklahoma  
Character of Well (completed as Oil, Gas or Dry Hole) \_\_\_\_\_  
Date well completed \_\_\_\_\_ 19\_\_\_\_  
Application for plugging filed 11-19-63 19\_\_\_\_  
Application for plugging approved 11-20-63 19\_\_\_\_  
Plugging commenced ~~12-7-63~~ 12-7-63 19\_\_\_\_  
Plugging completed 12-15-63 19\_\_\_\_  
Reason for abandonment of well or producing formation \_\_\_\_\_  
Dry  
If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well E. Petty  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3868 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	985	None
				5 1/2	None	3299

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Moved in. Cleaned out cellar.  
Rigged up. Take pipe off head. Put on control head. Working pipe. Shot pipe at 3260'.  
Working pipe. Circulating. Spotted 50 bbl. of oil.  
Working pipe.  
Working pipe. Pulling pipe.  
Pulling pipe. Pulled head. Shut in water.  
Squeezed well with 100 sacks of cement and 10 sacks of mud.

RECEIVED  
STATE CORPORATION COMMISSION

FEB 19 1964

CONSERVATION DIVISION  
Wichita, Kansas

2-19-64

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Forbes Casing Pulling, Inc.  
Address P. O. Box 221 Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.  
J. O. Forbes (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. O. Forbes  
P. O. Box 221 Great Bend, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 18 day of February, 1964

My commission expires May 27, 1964

[Signature]  
Notary Public.

Sunray Oil Corporation  
Tulsa, Oklahoma

Tulsa, Oklahoma  
November 16, 1953

Drilling Contractor: Stickle Drilling Company  
Drilling Commenced: October 30, 1953  
Drilling Completed: November 15, 1953

G. Brooks #1 NW-NW-NW  
Section 26-21S-16W,  
Pawnee County, Kansas.

DRILLERS LOG

Sand	0-70
Surface Clay & Shale	70-370
Shale	370-415
Dakota Sand	415-520
Red Bed	520-976
Anhydrite	976-1002
Shale & Shells	1002-1720
Shale & Lime	1720-1870
Lime & Shale	1870-2168
Lime	2168-2335
Lime & Shale	2335-2470
Shale & Lime	2470-3010
Lime	3010-3393
Lime & Shale	3393-3480
Lime	3480-3840
Simpson	3840-3868
Lime	3868-3870 TD

I, Frank E. Stickle hereby certify the above to be a true and complete drillers log of Sunray Oil Corporation's G. Brooks #1 NW-NW-NW- Section 26-21S-16W, Pawnee County, Kansas.

Frank E. Stickle  
Frank E. Stickle

Lillian T. Bonham  
Notary Public

February 13, 1956  
My Commission Expires

RECEIVED  
STATE CORPORATION COMMISSION  
FEB 24 1964  
CONSERVATION DIVISION  
Wichita, Kansas