

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

Pawnee County, Sec. 28 Twp. 21S Rge. 16W (E) (W)

Location as "NE/CNW/SW" or footage from lines. S/2 SE NW

Lease Owner ALPINE DRILLING CO., INC.

Lease Name Hewson Well No. 1

Office Address 800 Bitting Building, Wichita, Kansas 67202

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed October 2 1972

Application for plugging filed December 7 1972

Application for plugging approved December 8 1972


Plugging commenced December 20 1972

Plugging completed December 26 1972

Reason for abandonment of well or producing formation Non-producing in commercial quantities

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? _____

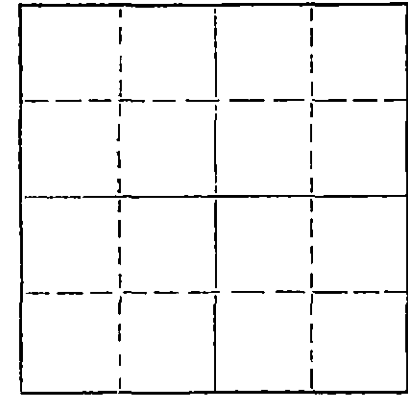

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Leo Massey

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3860 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	1037'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Pumped 1 sack of hull & 25 sacks of cement to plug off bottom. Stopped plug at 3180'. Shot 5-1/2" at 3161' and started pipe. Pulling pipe. Pumped 2 sacks of hulls, 20 sacks of gel mud & 100 sacks of cement to plug well.

STATE RECEIVED
STATE CORPORATION COMMISSION
JAN 19 1973
CONSERVATION DIVISION
Wichita, Kansas


(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Glenn & Smith Pipe Pulling Co.
Address 204 East Sixth Street, Ellinwood, Kansas 67526

STATE OF Kansas, COUNTY OF Sedgwick, ss.
Jon T. Williams, Jr. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
800 Bitting Building, Wichita, Kansas 67202
(Address)

Subscribed and sworn to before me this 18th day of January, 19 73

My commission expires February 23, 1976
Patricia J. Phillips Notary Public.



K. T. WOODMAN
REG. PHONE 733-0418
OFF. PHONE 265-7650
WICHITA, KANSAS

15-145-20267-0000

D. J. IANNITTI
PHONE 653-2381
HOISINGTON, KANSAS

WOODMAN & IANNITTI DRILLING COMPANY
Rotary Drilling Contractors

1008. UNION NATIONAL BUILDING

WICHITA, KANSAS 67202

October 9, 1972

RECEIVED
STATE CORPORATION COMMISSION
APR 12 1973
CONSERVATION DIVISION
Wichita, Kansas

Company;	Alpine Drilling Co., Inc.
Farm;	Hewson-Brown #1
Location;	C S/2 SE NW
Section;	28-21-16W
County;	Pawnee
Contractor;	Woodman & Iannitti Drilling Co.
Comm;	September 23, 1972
Compl;	October 2, 1972
Total Depth;	3860'
Casing;	8 5/8" @ 1030 w/400 sacks 5 1/2" @ 3853 w/100 sacks

Figures Indicate Bottom Of Formations:

70	Clay
480	Shale & Sand Streaks
600	Sand
800	Shale
1022	Shale & Shells
1030	Anhy
1045	Anhy
1825	Shale & Shells
2050	Shale & Lime
2240	Lime
2395	Lime
2920	Shale & Lime
3135	Shale & Lime
3365	Lime
3550	Lime
3610	Lime
3735	Lime
3810	Lime
3840	Lime & Chert
3848	Sand
3860	Total Depth

Woodman & Iannitti Drilling Co.

K. T. Woodman
K. T. Woodman