


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

McPherson County. Sec. 7 Twp. 21S Rge. 1 (E) W (W)
Location as "NE/CNW&SW" or footage from lines C SW SW SW
Lease Owner Charles L. Carlock
Lease Name Lagree Well No. 1
Office Address 1515 Hillcrest Road, Newton, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 7-7 19 68
Application for plugging filed 7-7 19 68
Application for plugging approved 7-7 19 68
Plugging commenced 7-7 19 68
Plugging completed 7-7 19 68
Reason for abandonment of well or producing formation Dry Hole

NORTH

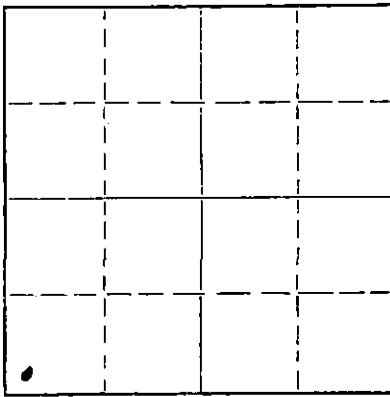

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Hugh Scott
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well _____ Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface pipe		-0-	210'	8 5/8"	210'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy mud.
#1 Plug set at 200' with 25 sks. cement.
#2 Plug set at 40' with 10 sks. cement.
#3 Plug in rat hole with 2 sks. cement.

RECEIVED
STATE CORPORATION COMMISSION
JUL 10 1968
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Sweetman Drilling, Inc.
Address Box 645, Great Bend, Kansas 67530


STATE OF Kansas, COUNTY OF Barton, ss.

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God!

(Signature) [Signature]
Box 645, Great Bend, Kansas 67530
(Address)

Subscribed and sworn to before me this 8th day of July, 1968
[Signature] Notary Public.

My commission expires _____



WELL LOG
Lagree #1
C SW SW SW 7-21S-1W
McPherson County, Kansas

FROM	TO	
0	275	Shale
275	710	Lime & Shale
710	1505	Shale & Lime
1505	2400	Lime & Shale
2400	3282	Lime
3282	3325	Shale
3325	3420	Lime
3420		Total Depth

RECEIVED
STATE CORPORATION COMMISSION
JUL 10 1968
CONSERVATION DIVISION
Wichita, Kansas

STATE OF KANSAS
COUNTY OF BARTON ss

T. D. Sweetman, President of Sweetman Drilling, Inc., being first duly sworn on oath says: That I have knowledge of the facts, statements and matters herein contained and the log of the above described well is filed and that the same are true and correct.

T. D. Sweetman
T. D. Sweetman

Subscribed and sworn before me this 8th day of July, 1968.

Beata L. Boyd
Notary Public Barton County

