


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

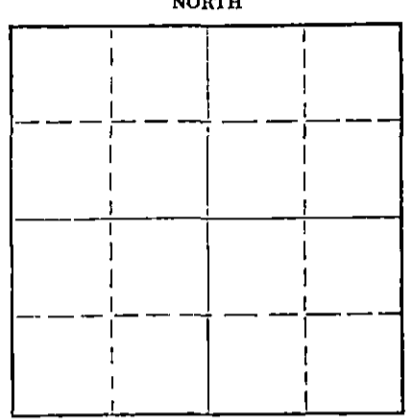

Locate well correctly on above Section Plat

McPherson County, Sec. 27 Twp. 21S Rge. 1 (E) 1 (W)
Location as "NE/CNWKSWK" or footage from lines SE NW NE
Lease Owner W. B. Osborn
Lease Name Dirksen Well No. 1
Office Address Box 6767, San Antonio, Texas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 6-25 19 71
Application for plugging filed 6-25 19 71
Application for plugging approved 6-25 19 71
Plugging commenced 6-25 19 71
Plugging completed 6-25 19 71
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Hugh Scott
Producing formation Depth to top Bottom Total Depth of Well 3535 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	218'	- - -

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.


Hole Mudded to 225'
1/2 sack Hulls, plug, and 25 sacks cement
Mud to 40'
1/2 sack Hulls, plug, and 10 sacks cement
Rathole capped with 2 sacks cement

RECEIVED
STATE CORPORATION COMMISSION
JUN 30 1971
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor White & Ellis Drilling, Inc.
Address Box 448, El Dorado, Kansas

STATE OF Kansas, COUNTY OF Butler, ss.
Ernest Sifford (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Ernest Sifford
(Address)



Subscribed and sworn to before me this 29th day of June, 19 71
L. B. Auer
Notary Public.
September 26, 1972

CASING RECORD

8 5/8"

218' Cemented
w/175 sacks

Location: SE NW NE
Section: 27-21S-1W
McPherson County, Kansas
Farm: Dirksen #1
Well Owner: W. B. Osborn
Contractor: WHITE & ELLIS DRILLING, INC.
Commenced: 6-17-71
Completed: 6-25-71

Total Depth 3535'

KELLY BUSHING MEASUREMENT 5' ABOVE GROUND LEVEL

<u>FORMATION</u>	<u>DEPTH</u>
Cellar	0-40
Shale & Lime (Stks.)	410
Lime w/Shale (Stks.)	1050
Lime & Shale	1148
Shale & Lime	1820
Lime	1900
Lime & Shale	1940
Lime	2020
Shale & Lime	2348
Lime	2719
Lime & Shale	2951
Lime	3292
Shale	3355
Lime	3403
Shale	3498
Shale & Lime	3517
Sand	3535

DRY HOLE

PLUGGED & ABANDONED

TOPS

Kansas City	2348
Mississippi	2951
Hunton	3355

STATE OF KANSAS
DEPARTMENT OF REVENUE
CONSERVATION DIVISION
Wichita, Kansas