


STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
TOPEKA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

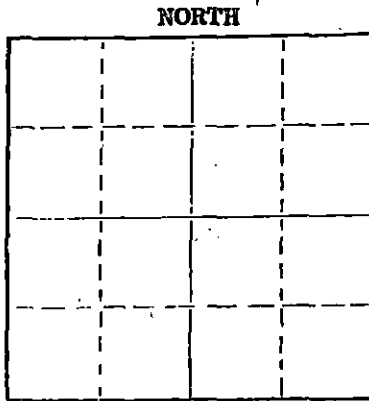

Locate well correctly on above Section Plat

McPherson County, Sec. 16 Twp. 21 Rge. 1 W(E) (W)
Location as "NE/CNWESW" or footage from lines 100' E of C/ NW NW
Lease Owner George Hess
Lease Name Arnold Well No. 2
Office Address 505 North Charles McPherson, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) oil
Date well completed 4-7 19 66
Application for plugging filed May 19 75
Application for plugging approved May 19 75
Plugging commenced May 20 19 75
Plugging completed May 22 19 75
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19 ____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Hugh Scott
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3355' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5 1/2"		2,700'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged off bottom of hole with sand. Sand from 3355' to 3300'. Dumped 5 sx of cement. Mudded hole to 160'. Made 10' of rock bridge. Dumped 25 sx of cement. Mudded hole to 40'. Made 10' of rock bridge. Dumped 10 sx of cement, filling to the bottom of the celler.

Name of Plugging Contractor Art Lamb Casing Pulling Inc.
Address 2809 King St. Hutchinson, Kansas 67501

STATE OF Kansas COUNTY OF Reno, ss.

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Art Lamb
2809 King St. Hutchinson, Kansas 75601
(Address)

SUBSCRIBED AND SWORN to before me this 22 day of May, 1975

My commission expires December 31, 1977 Judy Lamb Notary Public.

RECEIVED
MAY 27 1975

5-27-75



Blackstone Drilling, Inc.

Box 455 • 523 West Kansas • Phone CH 1-1250

McPHERSON • KANSAS

April 27th, 1968

COMPANY: GEORGE R. HESS, etal
 CONTRACTOR: BLACKSTONE DRILLING, INC.
 FARM: ARNOLD # 2
 LOCATED: 100' E of C-NW/4 NW/4, Sec. 16-21-18, McPherson, County, Kansas
 COMMENCED: April 1, 1968
 COMPLETED: April 7, 1968
 ELEVATION: 1482 N.B.

0	to	30	Sand
30	to	124	Shale
124	to	495	Shale & Lime
495	to	806	Lime
806	to	1160	Lime & Shale
1160	to	1855	Shale & Lime
1855	to	2130	Lime & Shale
2130	to	2304	Sand & Shale
2304	to	2700	Lime
2700	to	2826	Lime & Shale
2826	to	2926	Shale & Lime
2926	to	3227	Lime
3227	to	3355	Shale
		3355	T.D.

Handwritten notes:
 4 5/8
 5 9/5
 4.9

Stamp:
 RECEIVED
 APR 14 1968

Cut 12 1/4 in. hole to 124 ft. and run 125 ft. of 8 5/8 in. surface pipe and cemented with 75 sacks on bottom at 124 ft. Plug down at 4:00 P.M., April 1, 1968. Cut 7 7/8 in. hole to 3355 ft. and run 3377 ft. of 5 1/2 in. and cemented with 55 sacks cement and 3 1/2 Gal at 3355 ft. two feet off bottom. Plug down at 11:00 P.M., April 7, 1968.

TOPS: Brown Line - 2249' Kansas City - 2304' Mississippi - 2920' Hiner-3330'
 Kinderhook - 3227'

Measurements taken from N.B.

CERTIFICATE

I, H. J. Plouffe, President of Blackstone Drilling, Inc. do hereby certify that the above and foregoing is a true and correct copy of log on your Arnold #2, located on the 100 ft. E of C-NW/4 NW/4 of Sec. 16-21-18, McPherson County, Kansas as reflected by the files of Blackstone Drilling, Inc.

Signature of H. J. Plouffe
 H. J. Plouffe, President

Subscribed and sworn to before me a Notary Public in and for McPherson County, Kansas this 9th day of April, 1968.

Signature of Ruth McVay
 Ruth McVay - Notary Public



Expires: December 10, 1969.