

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bitting Building  
Wichita, Kansas

15.159-00462-0001

## WELL PLUGGING RECORD

04

## FORMATION PLUGGING RECORD

**Strike out upper line when reporting plugging off formations.**

Rice County. Sec. 21 Twp. 21 Rge. 6 (EX) (W)  
 Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines. Center W $\frac{1}{2}$  SW of SE  
 Lease Owner E. H. Adair et al  
 Lease Name Lackey Well No. 1  
 Office Address W&K&H Bldg. Wichita, Kansas  
 Character of Well (completed as Oil, Gas or Dry Hole) Abandoned Oil Well  
 Date well completed October 6 1941  
 Application for plugging filed July 11 1947  
 Application for plugging approved July 31 1947  
 Plugging commenced July 15 1947  
 Plugging completed July 27 1947  
 Reason for abandonment of well or producing formation  
Production depleted  
 If a producing well is abandoned, date of last production 1947  
 Was permission obtained from the Conservation Division or its agents before plugging was com-

Locate well correctly on above  
Section Plat

Name of Conservation Agent who supervised plugging of this well..... **Rue L Durkee**  
Producing formation..... **Miss. Chat**..... Depth to top..... **3337**..... Bottom **3386**..... Total Depth of Well..... **3386**..... Feet  
Show depth and thickness of all water, oil and gas formations.

## OIL, GAS OR WATER RECORDS


**CASING RECORD**

Formation	Content	From	To	Size	Put In	Pulled Out
Surface		0	102'3"	8 5/8	102'3"	None
Chat	Oil	3337	3386	4 1/2	3338'4"	2912.95

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from.....feet to.....feet for each plug set.

Four sacks of Cement ~~from~~ to bottom of hole at 3386;  
Hole filled with mud to bottom of surface pipe; Plug set at 110 feet and  
Twenty sacks cement on top of plug; filled with mud to bottom of cellar and  
Five sacks cement run to complete filling surface casing.

7-30-47



(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to E. H. Adair  
Address W-K-H Bldg., Wichita, Kansas

STATE OF Kansas, COUNTY OF Reno, ss. 1/23/19 Jack Walker for  
Walker-Powell Servicing Company (employee of owner) or (owner or operator) of the above-described well,  
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-  
described well as filed and that the same are true and correct. So help me God.

(Signature) H. M. Walker

215 West 12th, Hutchinson, Kansas

.....  
**(Address)**

SUBSCRIBED AND SWEARN to before me this 20 day of:

21-871-s 9-45-6M

My commission expires


June 23- 1951

*Nantucket Public*

**PLUGGING**  
FILE SEC 1 T 21 R 6 W  
BOOK PAGE 119 LINE 30

ALADDIN ET AL  
Lackey No. 1.SEC. 1 T.21 R. 6 W  
CW $\frac{1}{2}$  SW SEDEEPENING RECORDTotal Depth. 3386' SLM  
Comm. 9-8-41 Comp. 10-6-41  
Shot or Treated.  
Contractor, Ingling & Parker  
Issued. 4-11-42

County Rice.



## CASING.

85/8" 102'3"  
4 $\frac{1}{2}$ " 3338'4"

Elevation.


Production. Pot. 278 B.

Figures Indicate Bottom of Formations.

gravel & rod bed	40
lime and shale	102
shale and red bed	325
shale and lime	610
shale and salt	790
shale and lime	815
sdy lime	880
sdy lime and shale	990
lime	1090
lime and chert	1180
lime	1200
sdy lime	1275
sdy lime and shale	1340
shale and lime	1380
whale	1470
shale and lime	1634
lime hard	1664
shale limo shells	1705
shalo	1819
shalo and lime	1998
shalo and shells	2120
shalo	2239
shale and lime	2308
lime	2565
whale and shells	2650
limo and shale	2821
lime	2865
shale	2916
lime	2966
lime and shale	3247
shale and shells	3310
shale	3337
chat	3366

Total Depth.

Top of chat 3337

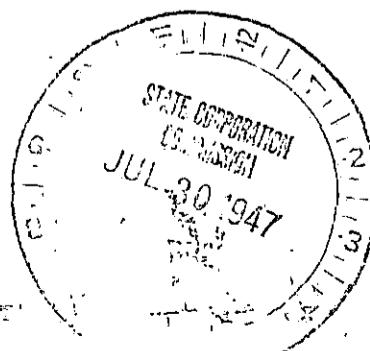DEEPENING RECORD:Comm. 2-11-42 Comp. 2-18-42  
No increase in productionchat 3366-86  
Total Depth. SLM

PLUGGING
FILE SEC. 1 T.21 R. 6 W
BOOK PAGE 119 LINE 30