

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

OR

FORMATION PLUGGING RECORD

Strike out upper line
when reporting plugging
of formations.

Barton County. Sec. 10 Twp. 16 Rge. 12 (~~E~~) (W)

Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines NW SW NW

Lease Owner The Phil-Han Oil Company

Lease Name Schauf Well No. 2

Office Address 1407 Union National Bank Bldg., Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry hole

Date well completed September 24, 1948 19

Application for plugging filed " 19

Application for plugging approved " 19


Plugging commenced " 19

Plugging completed " 19

Reason for abandonment of well or producing formation Dry

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

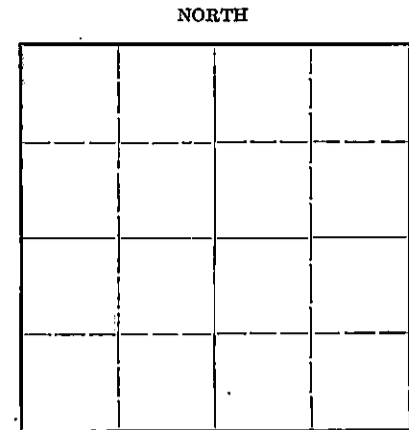

Locate well correctly on above
Section Plat

Name of Conservation Agent who supervised plugging of this well Stough

Producing formation Depth to top Bottom Total Depth of Well 3330 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8 5/8"	512'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled with heavy mud to 200', set plug and cemented with 15 sacks cement. Set plug at 30' and cemented with 10 sacks cement.

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to The Phil-Han Oil Company
Address 1407 Union National Bank Bldg., Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Perry R. Hanson (employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Perry R. Hanson

SUBSCRIBED AND SWORN to before me this 28th day of September, 1948

(Address) Wichita, Kansas
Walter A. Stemberg
Notary Public.

My commission expires Oct. 4, 1949.

PLUGGING 21-871-S
FILE SEC-127-16-R1W
BOOK PAGE 59 LINE 3

9-29-48

DRILLER'S LOG

#2 SCHAUF
The Phil-Han Oil Company

NW SW NW Section 10-16-12W
Barton County, Kansas

Comm: 9-12-48
Comp: 9-24-48

Production: D & A

shale, shells & sand	258
shale & lime shells	494
red rock	776
annhydrite	800
shale & shells	1100
shale & salt	1175
shale & shells	1450
lime & shale	1810
lime	1840
lime broken	1915
lime	2005
lime & shale	2150
lime broken	2210
lime & shale	2450
shale	2525
lime & shale	2695
lime	3330

T.D.

CASING RECORD:

8 5/8" surface casing set at 512' w/225 sacks.


STATE OF KANSAS)
)
SEDGWICK COUNTY)

I hereby certify that the above and foregoing is a true and correct copy of the log of our #2 Schauf, located in the NW SW NW Section 10-16-12W, Barton County, Kansas.

THE PHYL-HAN OIL COMPANY

By

Vernon D. Hanson



Subscribed and sworn to before me, this 28th day of September, 1948.

Nella A. Steimberg
N. P.

My com. expires Oct. 4, 1949.

PLUGGING
FILE SEC. 10-T-16-R-17W
BOOK PAGE 59-LINE 3