


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

WELL PLUGGING RECORD

15-185-00960-0000

NORTH

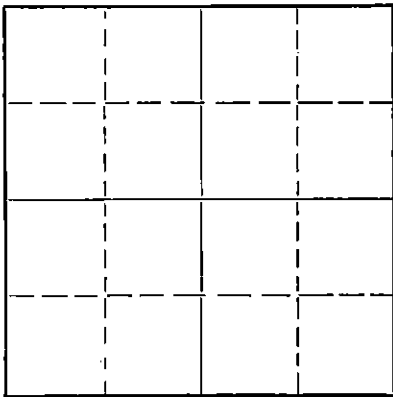

Locate well correctly on above
Section Plat

Stafford County, Sec. 31 Twp. 23 Rge. 14 ~~14~~ (W)
Location as "NE/CNW/SW" or footage from lines SW SW SW
Lease Owner Lee Phillips Oil Company
Lease Name ~~Hohner~~ Hohner Well No. 1
Office Address 1407 Union National Bank Bldg., Wichita, Kans.
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed July 17 19 54
Application for plugging filed July 17 19 54
Application for plugging approved July 17 (orally) 19 54
Plugging commenced July 17 19 54
Plugging completed July 17 19 54
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well M.A. Rives, Pratt, Kansas
Producing formation Depth to top Bottom Total Depth of Well Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface		0	200	8 5/8"	200'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with heavy mud from total depth 4160 to 200 feet.
Set plug at 200 feet and ran 20 sacks cement to 150 feet.
Filled with heavy mud from 150 feet to 35 feet.
Set plug at 35 feet and capped with 10 sacks cement.

7-20-54

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Harms-Burt Drilling Company
Address Box 184, Great Bend, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Nelle A. Salmon (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.
(Signature) Nelle A. Salmon


(Address)

SUBSCRIBED AND SWORN TO before me this 27th day of July, 19 54

My commission expires May 18, 1955

Mary R. Brann

Notary Public.



DRILLER'S LOG

15-085-00966-0000

Company: HARMS-BURT DRILLING COMPANY

Farm: ~~Hohner~~ No. 1

Lee Phillips Oil Company

SW SW SW Sec. 31-23S-14W
STAFFORD COUNTY, KANSAS

Commenced: July 5, 1954

Completed: July 16, 1954

Lee Phillips Oil Company #1 Hohner

Elevation:


0 -	30	sand and clay
30 -	125	sand
125 -	405	shale and shells
405 -	465	sand
465 -	935	red bed and shells
935 -	960	Anhydrite
960 -	1120	shale and shells
1120 -	1700	shale, shells and salt
1700 -	1785	shale and shells
1785 -	2065	lime and shale
2065 -	2335	lime
2335 -	2450	lime and shale
2450 -	2795	shale and lime
2795 -	3415	lime and shale
3415 -	3475	shale, sand and shells
3475 -	3585	lime
3585 -	3660	shale and lime
3660 -	3677	lime and shale
3677 -	3898	lime
3898 -	4035	lime and shale
4035 -	4077	lime and chert
4077 -	4105	shale and lime
4105 -	4135	lime and shale
4135 -	4160	lime
4160	TD	

Set 200' of 8 5/8" surface pipe, cemented with 250 sacks of common cement and 4 sacks calcium chloride.

Tops: Anhydrite 935
Lansing 3677
Arbuckle 4135

Ran Schlumberger

Dry, plugged and abandoned.

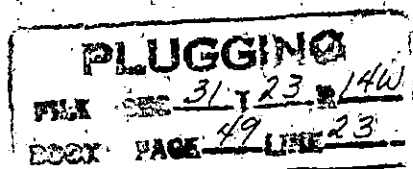

CONSERVATION

Wichita