


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

WELL PLUGGING RECORD

13-185-00737-0000

NORTH

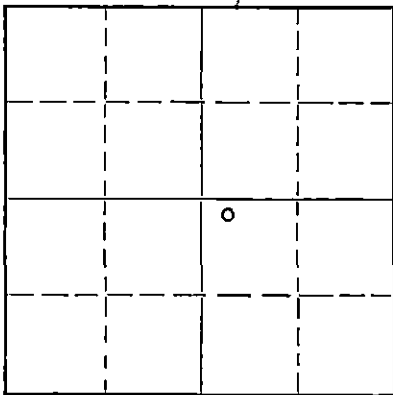

Locate well correctly on above
Section Plat

Stafford County. Sec. 32 Twp. 23 Rge. (E) 14 (W)
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines NW NW SE
Lease Owner Jackson Drilling Corporation
Lease Name Ward Well No. 1
Office Address 1009 Central Building-Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) dry hole
Date well completed December 4, 1951 19
Application for plugging filed (orally) December 5, 1951 19
Application for plugging approved " December 5, 1951 19
Plugging commenced December 5, 1951 19
Plugging completed December 5, 1951 19
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well G. D. Stough
Producing formation Depth to top Bottom Total Depth of Well 4121 RB Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Surface		0	252	10 3/4"	252	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with heavy mud from total depth to 240 feet
Set plug and ran 20 sacks cement to 200 feet
Filled hole with heavy mud from 200 feet to 30 feet
Set plug at 30 feet and ran 10 sacks cement to cellar.

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Jackson Drilling Corporation
Address 1009 Central Building, Wichita 2, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
G. E. Bitler (employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) G. E. Bitler

1009 Central Building, Wichita 2, Kansas
(Address)


SUBSCRIBED AND SWORN TO before me this 7th day of December, 1951

Ether Russell

Notary Public.

My commission expires May 25, 1953.

28-3273-s 4-50-10M



15-185-00737-0000

DRILLER'S LOG

COMPANY: Jackson Drilling Corporation
CONTRACTOR: Jackson Drilling Corporation
FARM: Ward No. 1
LOCATION: NW NW SE Section 32-23-14W
Stafford County, Kansas
COMMENCED: November 19, 1951
COMPLETED: December 5, 1951
ELEVATION: 1982 DF

0	to	40	Clay and sand
40	to	105	Sand
105	to	140	Shale and sand
140	to	250	Shale
250	to	380	Shale and red bed
380	to	430	Sand
430	to	550	Sandy shale
550	to	855	Shale and red bed
855	to	883	Red Bed
883	to	909	Anhydrite
909	to	1320	Shale and shells
1320	to	1390	Shale W/salt streaks
1390	to	1550	Shale and shells
1550	to	1865	Shale and lime
1865	to	1970	Lime
1970	to	2105	Lime and shale
2105	to	2230	Lime W/shale breaks
2230	to	2325	Lime
2325	to	2900	Shale and lime
2900	to	2925	Shale
2925	to	3315	Shale and lime
3315	to	3340	Lime
3340	to	3450	Lime and shale
3450	to	3512	Lime
3512	to	3588	Shale and lime
3588	to	3593	Brown lime
3593	to	3906	Lime
3906	to	3925	Shale and lime
3925	to	3965	Conglomerate
3965	to	4024	Lime and chert
4024	to	4027	Chert
4027	to	4044	Simpson
4044	to	4075	Lime & Shale W/chert
4075	to	4095	Lime W/shale & Chert
4095	to	4121	Arbuckle
		4121	T. D. (RB)

RECEIVED
STATE CONSERVATION COMMISSION
DEC - 8 1951
CONSERVATION DIVISION
Topeka, Kansas

Set 252 feet of 10 3/4" surface pipe. Cemented with 225 sacks cement and 3 sacks calcium chloride.

Drill Stem Tests: 3658-93, open 1 hour, rec 945 feet gassy cut salt water, 1250# BHP.

3789-3811, open 1 hour, rec 20 feet mud, no BHP.

TOPS: Heebner 3451. Brown Lime 3586. Lansing 3600. Viola 3906
Simpson 4024. Simpson sand 4047. Arbuckle 4079.


Dry, plugged and abandoned

FILE SEC 32-23-14W
BOOK PAGE 129 LINE 27

15-185-00737-0000

C E R T I F I C A T E

I, G. E. Bitler, do hereby certify that the above and foregoing is a true and correct copy of log of the Ward No. 1. Section 32-23-14W, Stafford County, Kansas, as reflected by files of the Jackson Drilling Corporation.


G. E. Bitler

Subscribed and sworn to before me, a Notary Public, within and for Sedgwick County, Kansas this 7th day of December, 1951.


Notary Public.

My Commission expires May 25, 1953.