

15-185-20408-0500

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
P. O. BOX 17027  
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

Stafford County, Sec. 23 Twp. 23 Rgo. (E) 14 (W)

Location as "NE/CNW&SW" or footage from lines NW SE NW

Lease Owner Leben Oil Corporation (Helman Gen. Kaiser)

Lease Name Miller Well No. 1

Office Address Box 666, Ellinwood, Kansas 67526

Character of Well (completed as Oil, Gas or Dry Hole) oil

Date well completed \_\_\_\_\_ 19\_\_

Application for plugging filed \_\_\_\_\_ 19\_\_

Application for plugging approved \_\_\_\_\_ 19\_\_


Plugging commenced April 19 19 75

Plugging completed April 26 19 75

Reason for abandonment of well or producing formation depleted

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_

Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

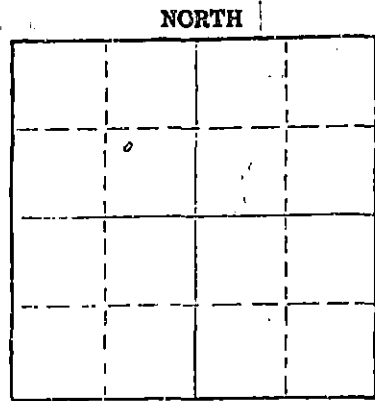

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well G. R. Biberstein

Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3794 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
			250'	8 5/8"	250'	none
			3794'	5 1/2"	3794'	3003.34

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Pushed plug to 3600'. Sanded back to 3590' and dumped 5 sacks of cement.

Sun Oil Well Cementing Company plugged well pumping in 3 sacks of hulls, 15 sacks of gel and 100 sacks of cement.

Name of Plugging Contractor PIPE PULLERS, INC. (If additional description is necessary, use BACK of this sheet)  
Address Box 128, Ellinwood, Kansas 67526

STATE OF KANSAS COUNTY OF BARTON  
Evelyn Roth (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Evelyn Roth  
Ellinwood, Kansas (Address)

Subscribed and sworn to before me this 29th day of April, 19 75

My commission expires \_\_\_\_\_  
**JENNY KASSELMAN**  
NOTARY-PUBLIC  
BARTON COUNTY, KANSAS  
MY COMM. EXP. JULY 16, 1978

Cherry Kasselman  
Notary Public.

RECEIVED  
STATE CORPORATION COMMISSION

APR 30 1975 4-30-75


CONSERVATION DIVISION  
Wichita, Kansas

KANSAS STATE SOCIETY  
508 EAST 10TH ST  
Wichita, Kansas

15-185-20408-0000

23-23-14W  
NWSE NW

MAY 5 1972



DRILLERS' LOG

8 BOPD + 30% water LKC

THEODORE I. LEBEN *Etal*  
No. 1 Miller  
NW SE NW, Sec. 23-23S-14W  
Stafford County, Kansas

1938' KB

Elev: 1935 D.F.

Commenced: 3- 4-72  
Completed: 3-10-72

Surface Casing: 250' of 8-5/8\*  
cemented w/250 sx cement. 3-4-72

<u>FORMATION</u>	<u>DEPTH</u>	<u>LOG TOPS:</u>
Surface	0 - 257	
Shale	257 - 375	*Anhydrite 841
Red Bed	375 - 841	Heebner 3406
Anhydrite	841 - 865	Brown Lime 3542
Shale	865 - 1660	LKC 3551
Lime & Shale	1660 - 1845	
Lime	1845 - 2435	
Lime & Shale	2435 - 2850	
Lime	1850 - 3795 T.D.	

I do hereby certify that the foregoing statements are true and correct to the best of my knowledge and belief.

D N B DRILLING, INC.

*James L. Donelson*  
JAMES L. DONELSON

DST (1) 3592-3620  
DST (2) 3670-85  
DST (3) 3690-3720

STATE OF KANSAS: ss:

Subscribed and sworn to before me, the undersigned, a Notary Public in and for said state, this 13th day of March, 1972.

My Commission Expires:  
August 25, 1972

*Ella Priess*

Ella Priess, Notary Public

RECEIVED  
STATE CORPORATION COMMISSION  
APR 17 1975  
CONSERVATION DIVISION  
Wichita, Kansas