


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

NORTH

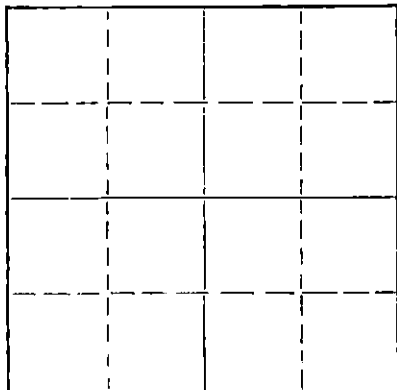

Locate well correctly on above  
Section Plat

McPherson County, Sec. 15 Twp. 21S Rge. 1W (~~E~~X)(W)  
Location as "NE/CNW%SW%" or footage from lines N/2 SW NW  
Lease Owner Bacon Resources Corporation  
Lease Name Fensky #1 Well No. 1  
Office Address Suite 1000 - Century Plaza, Wichita, Kansas 67202  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed July 6, 19 72  
Application for plugging filed July 5, 19 72  
Application for plugging approved July 5, 19 72  
Plugging commenced 6:30 AM, July 6, 19 72  
Plugging completed 9:00 AM, July 6, 19 72  
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production \_\_\_\_\_ 19 \_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Hugh E. Scott  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3420 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	210.18	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Filled hole with heavy mud.  
Plugged with 25 sacks cement at 210';  
10 sacks 0 - 40'; 2 sacks in rathole.

RECEIVED  
STATE CORPORATION COMMISSION

JUL 12 1972

CONSERVATION DIVISION  
Wichita, Kansas

7-12-72

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Sterling Drilling Company  
Address P. O. Box 129, Sterling, Kansas 67579

STATE OF KANSAS, COUNTY OF RICE, ss.  
F. A. Wuellner (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God. STERLING DRILLING COMPANY

(Signature) F. A. Wuellner  
F. A. Wuellner, Secretary  
P. O. Box 129, Sterling, Kansas 67579  
(Address)

SUBSCRIBED AND SWORN TO before me this 8th day of July, 19 72

My commission expires Jan. 22, 1974  
BERNARD LAUDERMILK - NOTARY PUBLIC

Bernard Laudermilk  
Bernard Laudermilk, Notary Public.

15-113-20180-0000

STERLING DRILLING COMPANY  
P. O. Box 129  
Sterling, Kansas 67579

WELL LOG ----- PENSKE #1  
Located: N/2 E/4 NE, Sec.15-21S-11W, McPherson County, Kansas

OWNER: Beacon Resources Corporation  
ROTARY DRILLING CONTRACTOR: Sterling Drilling Company

COMMENCED: June 28, 1972  
COMPLETED: July 6, 1972

TOTAL DEPTH: 3420'

<u>LOG</u>	<u>CASING RECORD</u>
0 - 218 Shale	Ran 5 joints 8 5/8" 20# new seamless casing, 198.68' pipe set at 210.18
218 - 2150 Shale and Lime	K.B. Cemented with 225 sacks 60/40 Pozmix. Plug down @ 11:30 PM, by Howco.
2150 - 2260 Shaley Lime	
2260 - 2430 Lime	
2430 - 3030 Lime and Shale	
3030 - 3210 Lime and Shale and Chert	
3210 - 3399 Shale and Lime	
3399 - 3420 Lime	Plugged.

RECEIVED  
STATE CORPORATION COMMISSION  
JUL 12 1972  
CONSERVATION DIVISION  
Wichita, Kansas