

15-145-20397-0600

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

Pawnee County, Sec. 5 Twp. 23 Rge. 15 (E) (W)

Location as "NE/CNW&SW4" or footage from lines SW NW NE

Lease Owner F & M Oil Co., Inc.

Lease Name BARSTOW Well No. 1

Office Address 603 Union Center Bldg, Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed July 11 1975

Application for plugging filed July 10 1975

Application for plugging approved July 10 1975


Plugging commenced July 11 1975

Plugging completed July 11 1975

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

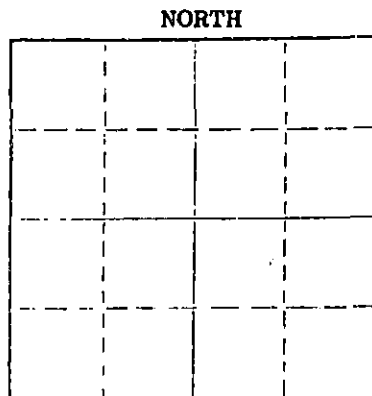

Locate well correctly on above Section Plot

Name of Conservation Agent who supervised plugging of this well Leo Massey

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4102 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8518	582	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Set plug @ 550' w/40 sacks cement thru drill pipe.

Top plug set @ 40' w/10 sacks cement and 1/2 sack hulls.

2 sacks cement in rat hole.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Duke Drilling Co.

Address Box 823, Great Bend, Kansas 67530

STATE OF KANSAS COUNTY OF BARTON

Leonard Williamson (employee of owner) or (XXXXXXXXXXXX) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Leonard Williamson

Box 823, Great Bend, Kansas 67530

(Address)

Subscribed and sworn to before me this 11th day of July 1975

My commission expires April 11, 1978

Notary Public

RECEIVED
STATE CORPORATION COMMISSION

JUL 14 1975

CONSERVATION DIVISION
Wichita, Kansas

DRILLERS' WELL LOG

DATE COMMENCED: June 29, 1975
DATE COMPLETED: July 11, 1975

F & M Oil Co.
BARSTOW # 1
SW. NW NE.
Sec. 5-T23-R15
Pawnee County, Kansas

ELEVATION: 2015 K.B.

0 - 158'	Surface Soil, Sand and Clay
158 - 547'	Shale, Sand, Red Bed
547 - 968'	Red Bed
968 - 997'	Anhydrite
997 - 2010'	Shale, Shells
2010 - 3037'	Lime and Shale
3037 - 3475'	Lime
3475 - 3480'	Shale
3480 - 3607'	Lime and Shale
3607 - 3849'	Lime
3849 - 3927'	Lime and Shale
3927 - 3970'	Lime, Shale
3970 - 4055'	Chert
4055 - 4102'	Shale, Sand, Dolomite
4102'	RTD

FORMATION DATA

Anhydrite	968
Howard	3037
Topeka	3100
Heebner	3475
Brown Lime	3595
Lansing - K.C.	3607
Base K.C.	3849
Conglomerate	3927
Viola	3970
Simpson Shale	4055
RTD	4102

SURFACE PIPE:

Set 582' used 28# pipe w/325
sacks Common w/2% Gel, 3% cc.

A F F I D A V I T

STATE OF KANSAS)
COUNTY OF BARTON) ss.

Leonard Williamson, of lawful age, does swear and state that the facts and statements herein contained are true and correct to the best of his knowledge.

Leonard Williamson

Subscribed and sworn to before me this 11th day of July, 1975.

Deirdre M. Hogue
Notary Public

My Commission Expires: April 11, 1978

RECEIVED
STATE CORPORATION COMMISSION

JUL 14 1975

CONSERVATION DIVISION
Wichita, Kansas