

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

NORTH

**Locate well correctly on above
Section Plat**

Name of Conservation Agent who supervised plugging of this well. Mr. Ruel E. Durkee McPherson, Kansas
Producing formation. Arbuckle Lime Depth to top. 3313' Bottom. 3364' Total Depth of Well. 3364 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

[illegible]

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from.....feet to feet for each plug set.

Hole was filled with heavy mud to within 230' of the top where a wood plug was set and cemented with 30 sacks of cement; the hole was then filled to within 25' of the top where a second plug was set and capped with 10 sacks of cement.

FILE 22 20-11W
BOOK 135-27

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Mr. F.L. Dunn
Address R.F.D. #4 Lyons, Kansas

STATE OF Kansas, COUNTY OF Rice, ss.
F.L. Dunn (employee of owner) or (owner or operator) of the above-described well,
 being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

R.F.D. #4 Lyons, Kansas

SUBSCRIBED AND SWORN to before me this 30th day of October 1944

My commission expires October 21st, 1948

20-1800-s 11-43-10M

FLD-HPD

W E L L R E C O R D

C. KASSELMAN NO. 1

Date Spudded: September 25, 1944
Drlg. Completed: October 15, 1944
Date Plugged: October 16, 1944

Loc: 330'S and 330'W of N/4 corner
of Section 22, T20S, R11W, Barton
County, Kansas

<u>FROM</u>	<u>TO</u>	<u>FORMATION</u>
0	486	Shale & Shells
486	521	Anhydrite
521	996	Shale & Shells
996	1106	Salt
1106	1226	Salt, Shale & Shells
1226	1421	Shale & Shells
1421	1716	Shale & Lime
1716	1896	Broken Lime
1896	1951	Lime

<u>FROM</u>	<u>TO</u>	<u>FORMATION</u>
1951	2176	Lime & Shale
2176	2256	Shale & Shells
2256	2511	Shale & Lime
2511	2601	Broken Lime
2601	2651	Lime & Shale
2651	2936	Lime
2936	3016	Lime & Shale
3016	3364	Lime

Elevation 1676'

Top of Kansas City Lime 3055'
Top of Arbuckle Lime 3313'

Ran 230'2" of 13 3/8" OD 48# 8T Lapweld casing; set at 228'; cemented with 225 sacks of Red Ring cement (Halliburton method).

10/13/44 - Cored from 3319' to 3324'. Recovered 2½' of Arbuckle lime with small stain of oil.

10/15/44 - Deepened to 3364' in Arbuckle lime. Set packer at 3314' and ran drill stem test, recovering 30' of mud - no show of oil.

Total depth 3364' in Arbuckle lime.

Plugged and abandoned October 16, 1944.

Note: Footages calculated from ground level.

:C: : : : : : / : : : : : : : : : : : : : : : : :

I, the undersigned, being first duly sworn upon oath, state that this Well Record is true, correct and complete according to the records of this office and to the best of my knowledge and belief.

~~Assistant District Superintendent~~


Subscribed and sworn to before me this 26th day of October, 1944.

Notary Public

My commission expires October 21st, 1948.

WMD-MKD
10-27-44
LPC 3
File

22 20 11W
135 27




15.009.01404.00.00

MATERIAL REPORT
AND
PLUGGING RECORD

Mail To: STATE CORPORATION COMMISSION
Conservation Division
800 Bitting Building
Wichita, Kansas

NOTICE: All questions on this form must be answered.

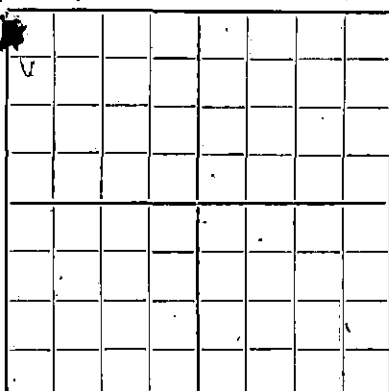W  E

Locate well correctly.

Company Operating.....Continental Oil Company
Office Address.....Box 1267, Ponca City, Oklahoma


County.....Barton.....Sec. 22 Twp. 20S Rge. 11W
Farm Name.....C. Kasselmann.....Well No. 1.....Field Silica Area
Well Location.....330'N and 330'E of Northwest/4 of above Section
Name of Producing Sand.....Arbuckle Lime.....Total Depth.....3364'
Commenced Plugging.....10-16-44.....Finished.....10-16-44
DAILY AVERAGE PRODUCTION:
Initial Production: Oil.....None.....Gas.....None.....Water.....None
Production when Plugged: Oil.....None.....Gas.....None.....Water.....None
Estimated Total Remaining Reserves Attributable to Well at Time Abandoned.....None

INFORMATION ON MATERIALS RECLAIMED FROM WELL
CASING, TUBING AND ROD DATA

Description	Size	Recovered		Junk		Reusable		Disposition Made Or To Be Made Of Usable Material
		Ft.	Tons	Ft.	Tons	Ft.	Tons	
None								

SURFACE EQUIPMENT

Quantity	Description	*Condition	Est. Tons	Disposition Made Or To Be Made Of Reclaimed Material
				Furnished by contractor.

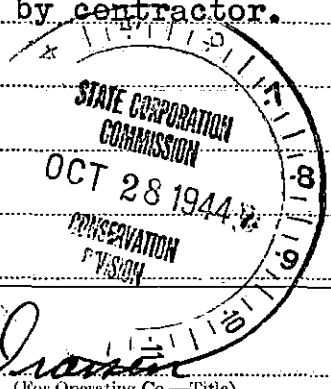

* Usable, Usable with minor repairs, or junk.
Date:.....October 26, 1944.....Signed:.....Wm. H. Brown.....
(For Operating Co.—Title)

PLUGGING
FILE 22 20 116
BOOK PAGE 125 LINE 27

(See note on reverse side)

It is very important that all questions on this form be answered, as this Department has been asked by the Petroleum Administration for War to supply data on well abandonments undertaken during the war.

This information is very essential in aiding the war effort; therefore, this Department is requiring this report to be mailed within 5 days after the abandonment of your well.

19-0756