

15.009.30508.00.00

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

WELL PLUGGING RECORD

Barton County, Sec. 22 Twp. 19S Rge. 13 (E) 13 (W)

Location as "NE/CNWKSWK" or footage from lines C NW SE NE  
Lease Owner C.R.C. Grose International, Inc.  
Lease Name Mullen Well No. 1  
Office Address Box 3227, Houston, Texas  
Character of Well (completed as Oil, Gas or Dry Hole) oil  
Date well completed December 20 19 66  
Application for plugging filed January 5, 19 67  
Application for plugging approved January 9 19 67  
Plugging commenced January 6 19 67  
Plugging completed January 10 19 67  
Reason for abandonment of well or producing formation depleted

NORTH

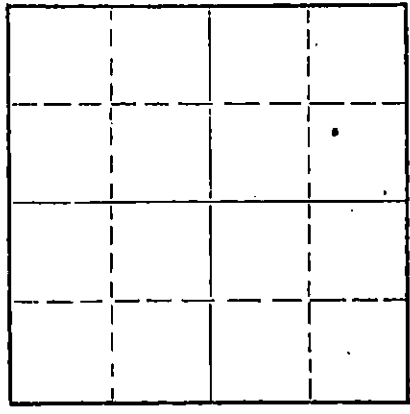

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Donald Truan  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 2350 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	420'	8 5/8"	420'	none
		0	2246'	4 1/2"	2246'	1840.12

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Pushed plug to 2080', set 10' rock bridge and dumped 4 sacks of cement at 2070'.  
Pushed plug to 350'. Set 25' rock bridge. Bailed hole down and filled hole with 4 1/2 yards of redi-mix concrete.

STATE CORPORATION COMMISSION

JAN 19 1967

CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Pipe Pullers, Inc.  
Address Box 486, Ellinwood, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.  
Dean Wells (employee of owner) or (~~owner or operator~~) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Dean Wells  
Ellinwood, Kansas  
(Address)

SUBSCRIBED AND SWORN to before me this 18th day of January, 19 67  
George A Meyer  
Notary Public.

My commission expires Feb. 10, 1967

5 009 30508.00.00

DRILLER'S LOG

Well Owner: C.R.G. Grose International  
Farm Name: Millen #1  
Date Started: 12-15-66  
Date Completed: 12-20-66  
Total Depth: 2350

NW SW NE  
Section 22-19S-13W  
Barton County, Kansas

Casings: 8-5/8" set at 417' cemented  
4 1/2" set at 2246' cemented

Contractor: Peel Brothers, Inc.

Figures below are the bottoms of formations:

Sand	0 - 70
Coarse Gravel	80
Clay	115
Shale, Sand, Shale	420
Shale, Red Bed	769
Anhydrite	789
Shale	975
Shale and Sand	1560
Lime and Shale	2250
Shale and Lime	2350
Total Depth	2350

RECEIVED

JAN 9 1967

This is to certify that the above information is to the best of our knowledge true and correct.

PEEL BROTHERS, INC.

*Wendell C. Peel*  
Wendell C. Peel  
President

SUBSCRIBED AND SWORN to before me this 21st day of December, 1966.

*Ethel S. Williamson*  
Ethel S. Williamson  
Notary Public

My Commission expires 6-21-70