


STATE OF KANSAS  
STATE CORPORATION COMMISSION  
Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

Barton County, Sec. 20 Twp. 19S Rge. 12W (E) (W)  
Location as "NE/CNW/SW" or footage from lines SE NW SE

Lease Owner Raymond Oil Company, Inc.  
Lease Name McNeive "A" Well No. 1  
Office Address 410 Fourth National Bank Building, Wichita 2, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed July 23, 1963  
Application for plugging filed July 23, (Verbal) 1963  
Application for plugging approved July 23, (Verbal) 1963  
Plugging commenced July 23, 1963  
Plugging completed July 23, 1963  
Reason for abandonment of well or producing formation Dry Hole



Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Donald Truan, Russell, Kansas  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3500 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	220'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Filled hole w/mud to 219'.  
Plugged w/1/2 Sx. hulls and 20 Sx. cement/  
Filled hole with mud to 35'.  
Plugged with 1/2 Sx. hulls and 20 Sx. cement.  
2 Sx. in rat hole.

RECEIVED  
STATE CORPORATION COMMISSION

AUG 9 1963

CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Raymond Oil Company, Inc.  
Address 410 Fourth National Bank Building, Wichita 2, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.  
Patrick R. Raymond (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Patrick R. Raymond  
Patrick R. Raymond, Exec. Vice Pres.  
410 Fourth National Bank Building  
(Address)

SUBSCRIBED AND SWORN TO before me this 6th day of August, 19 63

My commission expires July 9, 1966

Barbara A. Kennedy  
Barbara A. Kennedy - Notary Public.

15.009.06218.00.00

RAYMOND OIL COMPANY, INC.  
No. 1 McNeive "A"  
SE NW SE 20-19S-12W  
Barton County, Kansas

ELEVATION: 1887 KB  
1884 DF  
1877 GL

Contractor: Raymond Oil Company, Inc. - Rig #9  
Commenced: July 13, 1963  
Completed: July 23, 1963

Casing Record:  
8-5/8" @220' w/175 Sx.

Figures Indicate Bottom of Formation

<u>Formation</u>	<u>Depth</u>
Shale and Sand w/streaks of Iron	220
Sand, Shale and Pyritic Sand	350
Pyrite and Sand	490
Sand and Shale	725
Anhydrite	740
Redbed and Shale	1015
Shale and Shells	1540
Lime and Shale	2060
Shale and Shells	2130
Shale and Lime	2163
Lime and Shale	2375
Shale and Shells	2590
Shale and Lime	2730
Lime and Shale	3215
Lime	3241
Lime and Shale	3245
Lime	3282
Lime with Shale	3392
Lime	3464
Lime and Shale	3481
Lime	3500 TD


TOPS

Anhydrite	722
Topeka	2730
Heebner	3074
Toronto	3092
Douglas Shale	3109
Brown Lime	3189
Lansing-Kansas City	3203
Conglomerate	3447
Arbuckle	3471
Rotary Total Depth	3500

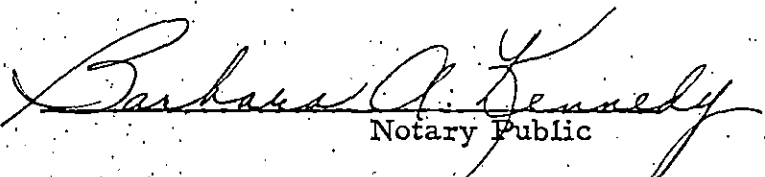
RECEIVED  
STATE CORPORATION COMMISSION  
AUG 9 1963  
CONSERVATION DIVISION  
Wichita, Kansas

STATE OF KANSAS )  
                              ) SS.  
COUNTY OF SEDGWICK )

I hereby certify that the above is true and correct to the best of my knowledge.

  
Patrick R. Raymond, Exec. Vice President

Subscribed and sworn to before me this 6th day of August, 1963.

  
Notary Public

My commission expires:  
July 9, 1966