

15.009.00898.00.00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas


Re

WELL PLUGGING RECORD

Barton County, Sec. 14 Twp. 18 Rge. (E) 11 (W)

Location as "NE/CNW/SW" or footage from lines NW NW NW
Lease Owner Wunderlich Development Co.
Lease Name Roesler "A" Well No. 1
Office Address 202 Patterson Bldg., Omaha, Nebraska
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced 9-21-60 19
Plugging completed 9-24-60 19
Reason for abandonment of well or producing formation

NORTH

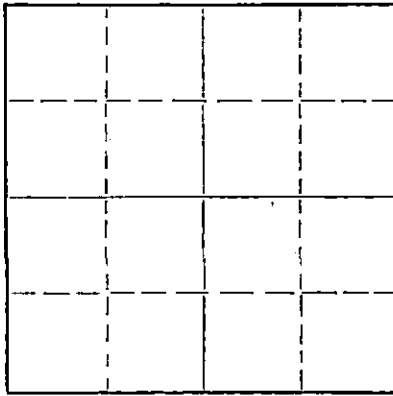

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Donald Truan
Producing formation Depth to top Bottom Total Depth of Well 3302 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	245'	none
				5 1/2"	3284'	2735'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Sanded hole from 3302' to 3270'-dumped 5 sks
cement-mudded hole to 240'-bailed fluid down-
set 10' rock bridge-dumped 25 sks cement-
Mudded to 40'-set 10' rock bridge-dumped 1
sks cement.

RECEIVED
STATE OF KANSAS

NOV 16 1960 11-16-60

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor R & D Casing Pulling Co. License #230
Address Box 154, Ellinwood, Kansas

STATE OF KANSAS, COUNTY OF Ren, ss.
J. W. Raiback (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. W. Raiback
Hutchinson, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 14th day of November, 1960

Wilma A. Clark
Notary Public.

My commission expires Nov. 16, 1961



15.009.00898.00.00

COPY

KANSAS WELL LOG BUREAU -- KANSAS GEOLOGICAL SOCIETY

508 EAST MURDOCK - WICHITA, KANSAS

COMPANY **BRANIFF-HOLL**

SEC 13 T. 18 R. 11W

FARM **Roesler** NO. 1

LOC. **NW NW NW**

TOTAL DEPTH **3298**

COUNTY **Barton**


COMM. **9-22-50**

COMP. **10-2-50**

SHOT OR TREATED

CONTRACTOR

ISSUED **3-31-51**



CASING

6 5/8" 262' con. w/ 125 sx
 6 1/2" 3396' con. w/ 75 sx

ELEVATION **1782**

PRODUCTION **220 bbls. oil / 20" wtr**

FIGURES INDICATE BOTTOM OF FORMATIONS

surface clay	30
sand	75
shale & shells	252
redbed & shale	570
Anhydrite	590
shale & shells	1065
salt & shale	1270
shale & shells	1375
lime & shale	1650
sandy lime	1715
shale & lime	1975
lime	2010
lime & shale	2650
lime	2699
lime & shale	2755
lime	2869
shale & lime	3000
lime	3298
Total depth	

Scout Tops:	
Heebner	2883
Brown lime	3001
Lensing	3018
Arbuckle	3294