


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

NORTH

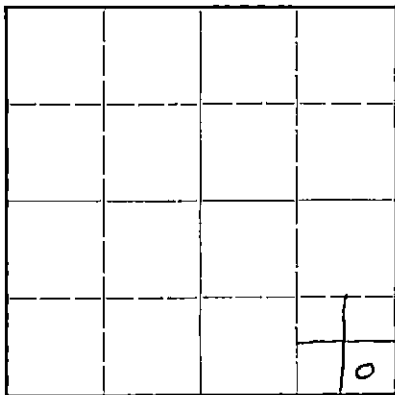

Locate well correctly on above
Section Flat

Name of Conservation Agent who supervised plugging of this well Mr. Kerr

Producing formation none Depth to top Bottom Total Depth of Well 3400 Feet

Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Surface		0'	210'	8 5/8"	210'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Hole was mudded back to 210', set bridge and cemented with 15 sacks. Mudded hole back to 20', set bridge, cut surface pipe off at base of cellar, cemented with 10 sacks of cement which returned to base of cellar covering surface pipe at point where it had been cut.

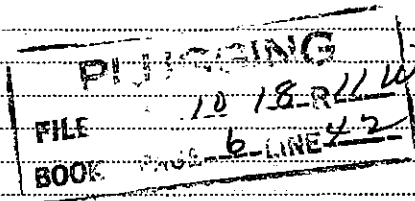

3-2545

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Kingwood Oil Company
Address Box 450, Effingham, Illinois

STATE OF Kansas, COUNTY OF Barton, ss.
I, G. W. Keyes, drilling contractor (employee of owner or owner or operator) of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) G. W. Keyes

Ellinwood, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 27th day of March, 1945.

L. J. Rader

Notary Public.

My commission expires July 7, 1948

15.009.01312.00.00

WELL LOG

Kingwood Oil Company, Owner - B. Musenberg #1

SE 1/4 SE 1/4 SE 1/4 Section 10, Township 28 S, Range 11 W,
Barton County, Kansas

Figures indicate bottom of formation

0	to	30	Clay
		210	Shale and shells
		680	Red bed and shale
		700	Anhydrite
		1050	Shale and shells
		1355	Shale and shells and salt
		1775	Lime and shale
		2130	Lime
		2220	Lime and shale
		2320	Shale and shells
		2415	Lime
		2500	Broken lime
		2620	Shale and shells
		2965	Lime
		3025	Lime and shale
		3300	Lime
		3343	Conglomerate
		3400	Lime
		3400	Total Depth

Note: Conglomerate top 3300
Arbuckle top 3343

State of Kansas)
County of Barton) ss

I, G. W. Keyes, Drilling Contractor of the above-described well, being first duly sworn on oath, declare That I have knowledge of the facts, statements and matters herein contained pertaining to the log of the above-described well as filed and that the same are true and correct. So help me God.

G. W. Keyes

Subscribed and Sworn to before me this 24th day of March, 1945.

J. J. Rader
Notary Public

My commission expires July 7, 1948

