


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

WELL PLUGGING RECORD

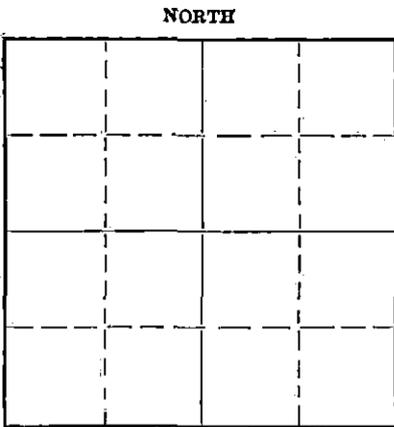

Locate well correctly on above Section Flat

Barton County, Sec. 19 Twp. 20 Rge. 12 (E) W. (W)
Location as "NE/CNW/SW" or footage from lines NW NE NE
Lease Owner Crowe Drilling Co., Inc.
Lease Name Batchman Well No. 1
Office Address 323 W-K-H Bldg.
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed June 28 19.49
Application for plugging filed June 28 19.49
Application for plugging approved June 28 19.49
Plugging commenced June 28 19.49
Plugging completed June 28 19.49
Reason for abandonment of well or producing formation Dry

If a producing well is abandoned, date of last production 19.
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Petty
Producing formation Depth to top Bottom Total Depth of Well 3480 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Sand	Water	55'	70'	8-5/8	307'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Wooden plug set 305 ft. 15 sks cement on top then heavy mud. Second plug was 10 sks cement at 35 ft. to top of surface pipe.

RECEIVED
JUL 28 1949
7-28-49
COMMISSION

(If additional description is necessary, use BACK of this sheet)
Correspondence regarding this well should be addressed to Crowe Drilling Co., Inc.
Address 323 W-K-H Bldg. Wichita, Kansas

STATE OF Kansas COUNTY OF Sedgwick, ss.
I. C. Crowe (employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) I. C. Crowe
323 W-K-H Bldg. Wichita, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 1st day of July, 1949.
Tommy Jean Wise Notary Public.

My commission expires December 8, 1952

2-5133-10M
PLUGGING
FILE SEC-19-T-20-R-100
BOOK PAGE 37

B A T C H M A N N O . 1
19 - 20 = 12

Barton County
Kansas

Surface casing

306'

306 - 905' Sand, Shale & Redbed

905 - 1525' Shale & Shells

1525 - 1655' Shale & lime-shells

1655 - 1800' Lime

1800 - 1855' Shale & Lime

1855 - 1935' Lime

1935 - 2390' Lime & Shale

2390 - 2575' Shale & Shells

2575 - 2710' Lime & Shale

2710 - 2795' Lime

2795 - 2870' Lime - Shale

2870 - 2935' Lime

2935 - 3015' Lime & Shale

3015 - 3065' Lime

3065 - 3160' Lime & Shale

3160 - 3380' Lime

3380 - 3437' Shale

3437 - 3464' Cong.

3464 - 3480' Lime

3480 - T.D.

C E R T I F I C A T I O N

STATE OF KANSAS)
) ss
COUNTY OF SEDGWICK)

I, L. C. Crowe, President of Crowe Drilling Company, Inc., hereby certify that the foregoing is a true and correct statement of drilling depths and formations of the above captioned well.

L. C. Crowe


L. C. Crowe

Subscribed and sworn to before me this 1st day of July, 1949.

Tommy Jean Wise

Notary Public

My commission expires December 8, 1952

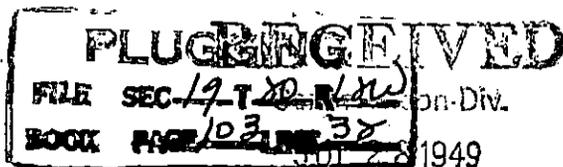

STATE CORPORATION
COMMISSION
KANSAS