

STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

OR  
FORMATION PLUGGING RECORD

Strike out upper line when reporting plugging off formations.

Give All Information Completely  
Make Requirements  
Mail or Deliver to  
Conservation Division  
State Corporation Commission  
800 Bittling Building  
Wichita, Kansas

Barton County, Sec. 2 Twp. 20 Rge. 12 (E) (W)

Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines. C SW NE

Lease Owner Lario Oil & Gas Company

Lease Name Ahlgrim Well No. 1

Office Address Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry hole

Date, well completed October 30 19.42

Application for plugging filed October 30 19.42

Application for plugging approved October 30 19.42


Plugging Commenced October 30 19.42

Plugging Completed October 30 19.42

Reason for abandonment of well or producing formation Dry hole

If a producing well is abandoned, date of last production 19.

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

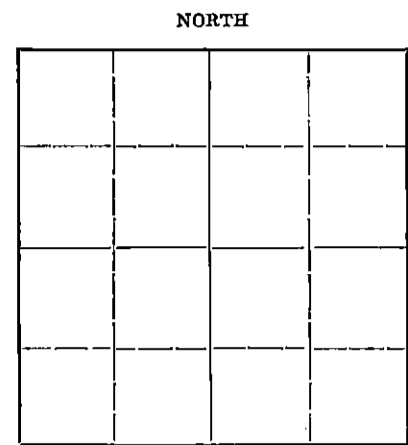

Locate well correctly on above Section Flat

Name of Conservation Agent who supervised plugging of this well C. T. Alexander

Producing formation Depth to top Bottom Total Depth of Well 3400 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8 5/8"	199' 2"	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.


Filled hole with heavy mud from total depth to 209 feet, bridged hole at 200', cemented with 10 sacks regular cement, filled surface pipe with mud to 20 feet bridged and cemented to top with 5 sacks of cement.

Handwritten notes: Pd. 1/26/43, FILE 2 20 12W, BOOK 55 PAGE 5

Handwritten number: 2-15-43

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to H. E. Miller, Lario Oil & Gas Co., Wichita, Kansas



STATE OF Kansas, COUNTY OF Sedgwick, Leo Ross (employee of owner) or (owner or operator) of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Leo Ross

301 S. Market, Wichita, Kansas. (Address)

SUBSCRIBED AND SWORN to before me this 15th day of February, 1943

Notary Public signature

My commission expires Sept 23, 1946



Drld. by Kiowa Drilling Co.  
Commenced - 10-16-42  
Completed - 11-2-42  
Casing - 8" - 199'  
Top Arbuckle - 3386' - D. & A.

WELL LOG

15.009.01370.00.00

KIOWA DRILLING COMPANY  
723 Union National Building  
Wichita, Kansas.

District Kansas Owner Lario Oil & Gas Co. Farm Alehrim Well No. 1

Location Section 2 Township 20 Range 12 County Barton State Kansas

CASING RECORD: 8 5/8 -- 199 feet, 90 sacks cement

FORMATION RECORD:

0 - 140	Sand & Gravel
301	Shale & Shells
460	Red Bed
590	Shale & Shells
596	Iron
1560	Shale & Shells
1620	Sand
1800	Shale & Shells
1870	Shale & Lime
2090	Shale
2115	Shale & Shells
2190	Shale
2650	Shale & Shells
2735	Lime & Shale
2870	Lime
2950	Lime Hard
2955	Shale
3045	Shale & Shells
3100	Shale
3170	Lime-Circulate for samples
3176	Lime-Cored 5' recovery
3182	Lime
3342	Cherty Lime
3367	Chat & Lime
3400	Lime T.D.

I HEREBY CERTIFY THAT this is a true and correct log.

KIOWA DRILLING COMPANY, INC.

BY Perry A. Thayer  
Vice-President

Subscribed and sworn to before me this 31st day of October, 1942

Viola G. Rees  
Notary Public

Well plugged October 30, 1942, under direction of Corporation Commission.

FILED  
OCT 20 1942  
BOOK PAGE 55 LINE 5

JAN 20 1943