

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Barton

County. Sec. 30 Twp. 20 Rge. (E) 11 (W)

Location as "NE/CNW/SW" or footage from lines C S/2 NE NE

Lease Owner C. E. Denman

Lease Name Hagen Well No. 2

Office Address 3115 Broadway, Great Bend, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) dry hole

Date well completed _____ 19__

Application for plugging filed November 21 1963

Application for plugging approved _____ 19__


Plugging commenced November 22 1963

Plugging completed December 2 1963

Reason for abandonment of well or producing formation dry hole

If a producing well is abandoned, date of last production _____ 19__

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

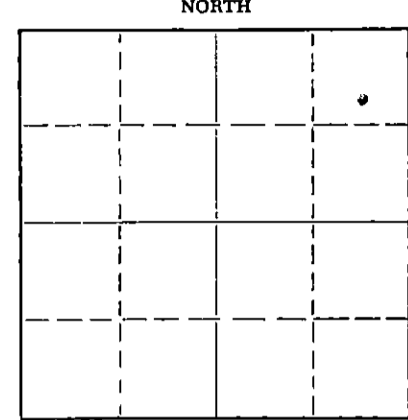

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Donald Truan

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3400 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	248	8 5/8"	248	none
		0	3399	5 1/2"	3399	2549.03

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Sand back to 3380'. Dump 5 sacks of cement.

Set 20' rock bridge at 240' and dump 2 sacks of calseal. Bail hole down to bridge. Dump 25 sacks of cement. Fill with mud and sand to 30' and cap with 10 sacks of cement.

RECEIVED
STATE CORPORATION COMMISSION

DEC 11 1963

CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor Pipe Pullers, Inc.
Address Box 486, Ellinwood, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
Dean Wells

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *Dean Wells*
Ellinwood, Kansas

SUBSCRIBED AND SWORN to before me this 9th day of December, 1963

My commission expires July 7, 1964

J. Kader
Notary Public.

15.009.30896.00.00

RECEIVED
STATE CORPORATION COMMISSION

WELL LOG

NOV 22 1963

Denman & Associates, HAGEN #2
C S/2 NE NE Section 30-20-11
Barton County, Kansas

CONSERVATION DIVISION
Wichita, Kansas

Figures indicate bottom of formation

ELEVATION: 1802' KB

PIPE RECORD:

8 5/8" set at 248' with
185 sacks cement.
5 1/2" set at 3399'
with 125 sacks cement.

0	to	10	cellar
		150	Shale & sand
		247	shale & shells
		510	red bed & shale
		1400	shale & shells
		2070	Lime & shale
		2490	shale & shells
		2940	lime & shale
		3055	shale & lime
		3350	lime & shale
		3400	rotary total depth

ROTARY COMMENCED: July 31, 1963
ROTARY COMPLETED: August 9, 1963

GEOLOGICAL TOPS:

Heebner	2955
Brown Lime	3088
Lansing	3102
Arbuckle	3346

I, Richard Hogg, Drilling Superintendent for the above-described well, being first duly sworn on oath, declare: That I have knowledge of the facts, statements and matter herein contained pertaining to the log of the above-described well, as filed, and that the same are true and correct.

Richard Hogg
Richard Hogg

Subscribed and sworn to before me on this 14th day of August, 1963

George A. Meyer
George A. Meyer

My commission expires February 10, 1964.