



15-159-20929-0000

State Corporation Commission

CONSERVATION DIVISION

(Oil, Gas and Water)

245 North Water

WICHITA, KANSAS 67202

August 13, 1980

JOHN CARLIN
R. C. LOUX
JANE T. ROY
WILLIAM G. GRAY
Carol J. Larson, Executive Secretary

Governor
Chairman
Commissioner
Commissioner

VERBAL PERMIT FORM
(To Be Filed By Plugging Agent)

RECEIVED
STATE CORPORATION COMMISSION
AUG 21 1980
CONSERVATION DIVISION
Wichita, Kansas

J. Lewis Bruck
Administrator
245 North Water
Wichita, Kansas 67202

Dear Sir:

Mr. John Crowe of De Mac Drilling, Inc has this date requested permission to plug the following described well:

Mr. Crowe guarantees payment of the plugging fee.

Operator's full Name: Kennedy & Mitchell, Inc.

Complete Address: 7400 W. Jefferson Ave, Denver Colorado

Lease Name: Extell Well No. 31-519

Location: SW NW NE Sec. 14 Twp. 21 Rge. 9 (W) X

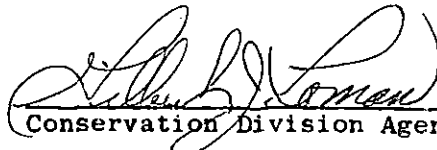
County: Rice Total Depth 3600' Oil Well

Gas Well Input Well SWD Well D & A Lost Hole

Mr. Crowe was instructed to plug the well as follows:

8 5/8" - 286-225 sacks Fill hole with mud. Pump 40 sacks
Cement through drill pipe at 500'. Pump 25 sacks Cement
through drill pipe at 280'. Fill hole with mud to 40'.
Push plug and 1/2 sack pulls to 40' and cap hole with
10 sacks Cement. Cement rat hole with 5 sacks cement.

Very truly yours,


Conservation Division Agent