

STATE OF KANSAS
STATE CORPORATION COMMISSION


Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission

WELL PLUGGING RECORD

P. O. Box 17027
Wichita, Kansas 67217
NORTH

Rice County, Sec. 9 Twp. 21S Rge. 10W (SW) (W)
Location as "NE/CNW/SW" or footage from lines C W/2 SW/4
Lease Owner Lebsack Oil Production, Inc.
Lease Name Margaret Boy #1 Well No. 1
Office Address P. O. Box 489, Hays, Kansas 67601
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed October 30, 1974 19
Application for plugging filed October 30, 1974 19
Application for plugging approved October 30, 1974 19
Plugging commenced 9:30 PM, October 30, 1974 19
Plugging completed 11:45 PM, October 30, 1974 19
Reason for abandonment of well or producing formation Dry Hole

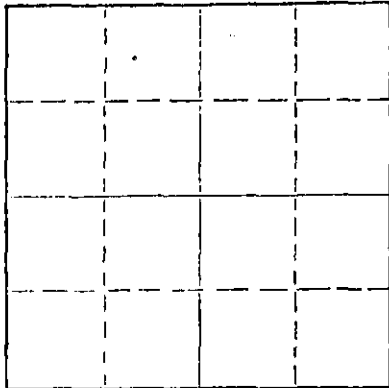

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Toman
Producing formation Depth to top Bottom Total Depth of Well 2580' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	212'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with heavy mud.
Spotted 40 sacks at 400' through open ended
drill pipe; spotted 25 sacks at 200' through
open ended drill pipe; Howco plug and 1/4
sack hulls at 40' and 10 sacks to surface;
2 sacks in rathole.

RECEIVED
STATE CORPORATION COMMISSION
NOV 7 1974
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor STERLING DRILLING COMPANY
Address P. O. Box 129, Sterling, Kansas 67579

STATE OF KANSAS, COUNTY OF RICE, ss.
F. A. Wuellner (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God. STERLING DRILLING COMPANY

(Signature) F. A. Wuellner, Secretary
P. O. Box 129, Sterling, Kansas 67579
(Address)

SUBSCRIBED AND SWORN to before me this 5th day of November, 1974

BERNARD LAUDERMILK - NOTARY PUBLIC
My commission expires Jan. 22, 1978
Bernard Laudermilk, Notary Public.

STERLING DRILLING COMPANY
 P. O. Box 129
 Sterling, Kansas 67579

WELL LOG ----- MARGARET BOY #1
 Located: C W/2 SW/4, Section 9-21S-10W, Rice County, Kansas

OWNER: Lebsack Oil Production, Inc.
 ROTARY DRILLING CONTRACTOR: Sterling Drilling Company

COMMENCED: October 26, 1974
 COMPLETED: October 30, 1974

TOTAL DEPTH: 2580'

<u>LOG</u>	<u>CASING RECORD</u>
0 - 170 Sand and Red Bed	Ran 5 joints used 8 5/8" casing, 200.5' set at 212' KB with 200 sacks 60-40 Pozmix with 3% cc. Plug down at 5:30 PM, 10-26-74.
170 - 600 Shale	
600 - 1315 Shale, Salt, Lime	
1315 - 2510 Lime and Shale	
2510 - 2556 Shale	
2556 - 2580 Shale, Sand	Plugged.

RECEIVED
 STATE CORPORATION COMMISSION
 NOV 7 1974
 CONSERVATION DIVISION
 Wichita, Kansas