


STATE OF KANSAS  
 STATE CORPORATION COMMISSION  
 CONSERVATION DIVISION  
 P. O. BOX 17027  
 WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

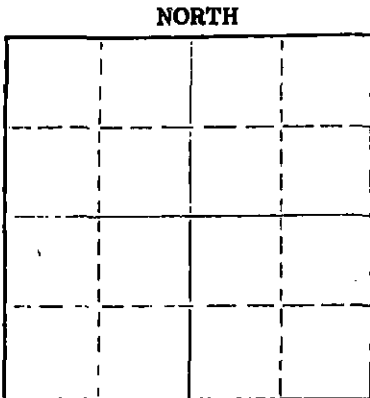

Locate well correctly on above Section Plot

Rice County. Sec. 7 Twp. 21S Rge. 10W (E) (W)  
 Location as "NE/CNW/SW" or footage from lines C S/2 SE/4  
 Lease Owner MAPCO, Inc.  
 Lease Name Sessler Well No. 1-7  
 Office Address 1437 South Boulder Avenue, Tulsa, Oklahoma 74119  
 Character of Well (completed as Oil, Gas or Dry Hole) D & A  
 Date well completed April 1 1975  
 Application for plugging filed April 1 1975  
 Application for plugging approved April 1 1975  
 Plugging commenced April 1 1975  
 Plugging completed April 1 1975  
 Reason for abandonment of well or producing formation D & A

If a producing well is abandoned, date of last production 19  
 Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Gilbert Toman  
 Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 2620 Feet  
 Show depth and darkness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	249.79'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Mud to 500'. Spot 45 sx. cmt.  
 Mud to 240'. Spot 25 sx. cmt.  
 Mud to 40'. 1/2 sk. hulls, plug w/10 sx. cmt.  
 2 sx. cmt. in rathole.

RECEIVED  
 STATE CORPORATION COMMISSION

Name of Plugging Contractor Red Tiger Drilling Company (If additional description is necessary, use BACK of this sheet)  
 Address 1720 Wichita Plaza, Wichita, Kansas 67202 4-14-75 4-14-75


STATE OF Kansas COUNTY OF Sedgwick ss. Wichita, Kansas  
Linda H. Dickens (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Linda N. Dickens  
1720 Wichita Plaza, Wichita, Kansas 67202  
 (Address)

SUBSCRIBED AND SWORN TO before me this 8th day of April, 19 75

My commission expires December 28, 1977  
D'Ann Drennan Notary Public.



DRILLERS LOG

No. 1-7 Sessler

CASING RECORD:	COMPANY:	MAPCO, Inc.	DESCRIPTION:
8-5/8" @ 249.79' w/225 sx. cmt.	CONTRACTOR:	Red Tiger Drilling Co.	C S/2 SE/4 7-21S-10W Rice County, Kansas
	COMMENCED:	March 26, 1975	
	COMPLETED:	April 1, 1975	

TOTAL DEPTH: 2620'

ELEVATION: 1739' K.B.

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Sand	0	110	
Redbed	110	413	
Anhydrite	413	432	
Shale & Shells	432	980	
Shale	980	1250	
Shale & Lime	1250	1335	
Lime	1335	1379	
Sand, Lime & Shale	1379	1462	
Lime & Shale	1462	2220	
Gummy Shale & Lime	2220	2300	
Shale & Lime	2300	2620	

I certify that this is a true and correct copy of the above log to the best of my knowledge.

**RECEIVED**  
STATE CORPORATION COMMISSION

APR 4 1975

RED TIGER DRILLING COMPANY

CONSERVATION DIVISION  
Wichita, Kansas

Linda H. Dickens  
Linda H. Dickens

Subscribed and sworn to before me this 8th day of April, 1975.

D'Ann Drennan  
Notary Public

My Commission Expires:

December 28, 1977

