

15-145-00924-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION


Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

Pawnee County, Sec. 19 Twp. 23 Rge. 15 (E) (W) X

NORTH

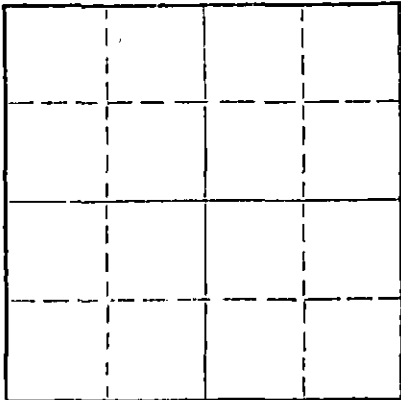

Locate well correctly on above
Section Plat

Location as "NE/CNW/SW" or footage from lines NE NW

Lease Owner Thomas H. Allan

Lease Name Wiles Well No. 1

Office Address R. R. No. 1 Great Bend, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) _____

Date well completed _____ 19__

Application for plugging filed 5-25-67 19__

Application for plugging approved 5-26-67 19__

Plugging commenced 6-29-67 19__

Plugging completed 7-17-67 19__

Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19__

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo F. Massey

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3099 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	259	None
				5 1/2	None	2187

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Moved in unit.

Cleaned out cellar.

Sanded to 3000'. Dumped 5 sacks of cement. Working pipe.

Shot pipe at 2185' - 2390' and 2200'.

Working pipe. Pulling pipe.

Squeezed well with 25 sacks of mud and 80 sacks of cement.

RECEIVED
STATE CORPORATION COMMISSION

JUL 20 1967

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Forbes Casing Pulling, Inc.

Address P. O. Box 221 Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.

J. O. Forbes (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. O. Forbes

P. O. Box 221 Great Bend, Kansas

(Address)

SUBSCRIBED AND SWORN TO before me this 19 day of July, 19 67

My commission expires May 27, 1969

Notary Public.

THOS. H. ALLAN, SR.
Union Center Bldg.
Wichita, Kansas

15-145-00524-0000

Well: Wiles No. 1
Commenced R.D.: 6/ 2/64
Completed R.D.: 6/ 8/64
Total Depth: 3,099' D.F.
Casing: 259' of 8 5/8" Surface Pipe
99 Jts. 5 1/2" 14# Oil String @ 3098'

Sec. 19-23-15W .
Pawnee County, Kansas
Elevation:
Initial Prod:
Contractor: BURT DRILLING
COMPANY


Strata	Depth
Sand & gravel	0- 80'
Blue shale	80- 258
Shale & shells	258- 450
Sand	450- 520
Shale & shells	520- 973
Anhydrite	973- 996
Shale & shells	996-1665
Shale w/lime streaks	1665-1830
Lime w/shale streaks	1830-2395
Shale & lime	2395-2450
Lime w/shale streaks	2450-2605
Lime & shale	2605-2850
Shale	2850-2892
Lime w/shale streaks	2892-2918
Sand & shale	2918-2974
Lime	2974-3099

I hereby certify that the above is a true and correct log of said well as reflected by daily reports.

BURT DRILLING CO.



Signed and sworn to in my presence this 13th day of June, 1964.



Notary Public

May Commission Expires: April 2, 1968