

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas


WELL PLUGGING RECORD

OR

FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging off formations.

NORTH

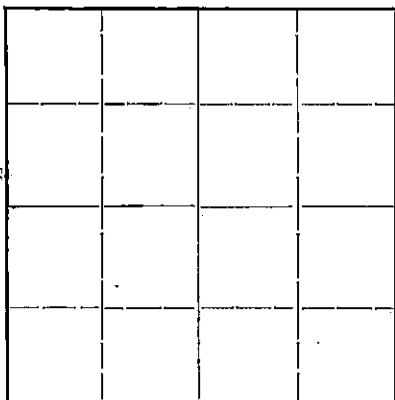

Locate well correctly on above
Section Plat

McPherson County. Sec. 26 Twp. 21 S. Rge. (E) 2 (W)
Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines. SE SE
Lease Owner. Dickey Oil Co. & Kiowa Drilling Company, Inc.
Lease Name. Reusser Well No. 1
Office Address. 717 Union National Bank Bldg., Wichita, Kansas.
Character of Well (completed as Oil, Gas or Dry Hole) DRY HOLE
Date, well completed. August 17, 1941 19
Application for plugging filed. August 17, 1941 19
Application for plugging approved. August 17, 1941. 19
Plugging Commenced. August 17, 1941. 19
Plugging Completed. August 17, 1941. 19
Reason for abandonment of well or producing formation
DRY HOLE
If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? yes

Name of Conservation Agent who supervised plugging of this well. Ruel Durkee
Producing formation. Depth to top. Bottom. Total Depth of Well 3665 Feet
Show depth and thickness of all water, oil and gas formations.



OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Chat	water	2985				
Hunton	water	3424				
Arbuckle	water	3642	3665	Dry and abandoned		

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Hole filled with mud, bridged bottom surface pipe 140' put in 10 sacks Cement, bridged surface pipe at 14' and put in 5 sacks cement and welded piece of iron on top of surface pipe.



(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to. Kiowa Drilling Company, Inc.
Address. 717 Union National Bank Bldg., Wichita, Kansas.

STATE OF KANSAS, COUNTY OF Sedgwick, ss.
Perry A. Thayer (employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature)

Perry A. Thayer

717 Union National Bank Bldg., Wichita, Kans.
(Address)

SUBSCRIBED AND SWORN to before me this August 19, 1941.

My commission expires February 19 - 1945





KIOWA DRILLING COMPANY

723 UNION NATIONAL BUILDING

WICHITA, KANSAS

DISTRICT _____ OWNER Dickey Oil Co. et al FARM Reusser WELL No. 1

SE SE

LOCATION: Section 26 Township 21 Range 2 County McPherson State Kansas


CASING RECORD:

Size <u>8 5/8</u>	O. D.	Weight _____	lbs.	Amount <u>140</u>	ft.	Cemented <u>40</u>	Sacks	Kind Cement <u>Oil</u>	Max Ht. _____
Size _____	O. D.	Weight _____	lbs.	Amount _____	ft.	Cemented _____	Sacks	Kind Cement _____	
Size _____	O. D.	Weight _____	lbs.	Amount _____	ft.	Cemented _____	Sacks	Kind Cement _____	

FORMATION RECORD:

0 - 15 Clay
 50 Sand
 180 Shale & Lime Shells
 334 Shale & Shells
 432 Anhydrite
 445 Shale
 490 Lime
 567 Shale & Lime
 687 Sandy Shale
 645 Shale & Lime
 675 Lime
 685 Sand
 695 Shale
 745 Lime
 782 Red Rock
 800 Shale & Shells
 815 Lime
 820 Shale
 840 Lime
 870 Shale & Red Rock Shells
 885 Shale & Lime
 905 Lime
 913 Shale
 930 Lime
 942 Shale
 977 Lime
 1038 Shale & Shells
 1045 Lime
 1085 Shale & Shells
 1100 Lime
 1160 Shale & Lime
 1165 Lime
 1229 Shale
 1235 Red Rock
 1271 Shale

1450 Shale & Lime
 1490 Lime
 1800 Shale & Lime
 1900 Lime
 1955 Lime & Shale
 2025 Lime
 2068 Shale & Lime
 2125 Lime
 2156 Shale
 2190 Sand
 2270 Sand & Shale Broken
 2349 Lime
 2354 Shale
 2484 Lime
 2479 Sandy Lime
 2663 Lime
 2671 Shale
 2779 Lime
 2803 Shale & Shells
 2839 Lime
 2880 Shale
 2895 Shale & Lime
 3005 Chert
 3034 Lime & Chert
 3043 Chert
 3062 Shale & Lime
 3137 Chert & Lime
 3190 Chert
 3220 Lime & Chert
 3235 Chert
 3247 Shale & Lime
 3294 Lime
 3311 Chert & Lime
 3359 Lime
 3413 Shale
 3489 Lime Top Hunton 3424'



26 21 2W
 26
 3000 AUG 3 26

KIOWA DRILLING COMPANY

723 UNION NATIONAL BUILDING

WICHITA, KANSAS

Page 2

DISTRICT _____ OWNER Dickey Oil Co. et al FARM Reusser WELL No. 1
 LOCATION: Section 28 Township 21S Range 2W County McPherson State Kansas

CASING RECORD:

Size	O. D.	Weight	lbs.	Amount	ft.	Cemented	Sacks	Kind Cement
Size	O. D.	Weight	lbs.	Amount	ft.	Cemented	Sacks	Kind Cement
Size	O. D.	Weight	lbs.	Amount	ft.	Cemented	Sacks	Kind Cement

FORMATION RECORD:

3497 Shale
 3538 Shale & Lime
 3566 Lime
 3581 Sand
 3601 Lime Hard
 3630 Sand & Pyrite
 3665 Lime Total Depth, Dry &
 Abandoned

Top of Arbuckle 3642'

I hereby certify that the above
 log is correct.

KIOWA DRILLING COMPANY, INC.

By Perry G. Shyer

Subscribed and sworn to before me,
 this 18th day of August, 1941.

Walter L. Rees
 Notary Public

My Comm. expires:
 February 19, 1945.

