

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bitting Building  
Wichita, Kansas

OR 15-009-06370-0000  
FORMATION PLUGGING RECORD Strike out upper line when reporting plugging off formations.

Barton County. Sec. 15 Twp. 16S Rge. 12 (X) W (W)

Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines SW SE SW

Lease Owner Vickers Petroleum Co., Inc.

Lease Name Ehly Well No. 3

Office Address 201 W-K-H Bldg., Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) dry

Date well completed April 27 19.47

Application for plugging filed July 14 19.47

Application for plugging approved July 28 19.47

Plugging commenced July 14 19.47

Plugging completed July 19 19.47

Reason for abandonment of well or producing formation Dry

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well H. W. Kerr

Producing formation Arbuckle Depth to top 3363 Bottom 3369 Total Depth of Well 3369 Feet

Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Surface		0	502'	8-5/8"	502'	0
Arbuckle	Dry	0	3363'	5-1/2"	3363'	2747'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Fill pipe from 3240-3150 sand. Dump 5 sx cement @ 3150. Shot 5 1/2 @ 2747.  
Pull 5 1/2" and filled hole to 300' w/mud. Set plug @ 300'. Dump 15 sx cement.  
Fill hole w/mud to 30', dump 10 sx cement. Filled hole to bottom of cellar.

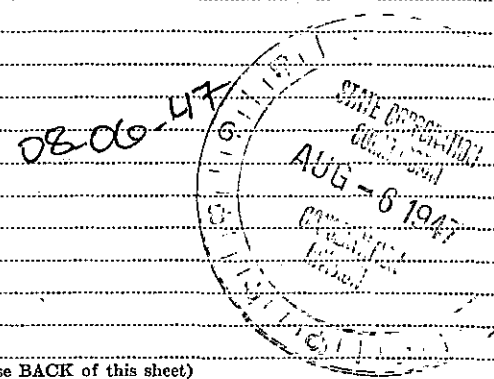

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to The Vickers Petroleum co., Inc.  
Address 201 W-K-H Building, Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.  
John M. Little (employee of owner) or (owner or operator) of the above-described well,  
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *John M. Little*  
201 W-K-H Building, Wichita, Kansas  
(Address)

SUBSCRIBED AND SWORN to before me this 5th day of August, 19.47  
*Allen P. Denton*  
Notary Public.

My commission expires August 13, 1949

PLUGGING  
FILE SEC 15 T 16 R 12W  
BOOK PAGE 122 LINE 35

THE VICKERS PETROLEUM CO., INC.

Ohly #3  
 SW $\frac{1}{4}$  SE $\frac{1}{4}$  SW $\frac{1}{4}$  Sec. 15-16S-12W  
 Barton County, Kansas

Commenced: April 8, 1947  
 Completed: April 27, 1947

Casing Record:  
 8-5/8" @ 502 w/140 sx.  
 5 $\frac{1}{2}$ " @ 336 $\frac{1}{2}$  w/90 sx.

Elevation 1908  
 Dry and Abandoned

LOG

Shale & Lime	0 -180	Lime, broken	1570-1870
Sand	180-220	Shale & Lime	1870-1910
Shale & Shells	220-310	Lime, broken	1910-1990
Sand & Shale	310-450	Lime	1990-2140
Shale	450-502	Lime & Shale	2140-2190
Shale & Shells	502-610	Shale & Shells	2190-2388
Redbed	610-795	Shale & Lime	2388-2505
Anhydrite, Sandy	795-825	Lime & Shale	2505-2625
Shale & Redbed	825-860	Lime & Broken Shale	2625-2710
Shale	860-945	Lime, broken	2710-2780
Shale & Shells	945-1180	Lime & Shale	2780-3035
Salt & Shale	1180-1190	Shale	3035-3075
Salt	1190-1380	Lime	3075-3345
Shale & Shells	1380-1470	Shale, Sand, Conglom.	3345-3363
Shale	1470-1500	Lime, Arbuckle	3363-3367 RTD
Lime	1500-1520	Lime, Arbuckle	3367-3369 TD
Shale & Lime	1520-1570		

Well drilled in with cable tools from  
 3367 to 3369 TD. Perforated 28 shots.  
 3172-3184. Acidize with 500 gallons - water  
 Tops: Lansing 3072 DF  
 Arbuckle 3363 DF

I hereby certify that this log is true and correct to the best of my knowledge  
 and belief.

THE VICKERS PETROLEUM CO., INC.

By

*H. C. Davis*

Subscribed and sworn to before me this  
7th day of May, 1947.

*Allen J. Denton*  
 Notary Public

(My Commission expires August 13, 1949.

