

15.009.01353.00.00

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD
OR
FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging of formations.

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission,
800 Bitting Building
Wichita, Kansas

Barton County, Sec. 14 Twp. 17 Rge. (E) 12 (W)

Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines NEc SE SW

Lease Owner Lauck & Moncrief

Lease Name Ficker Well No. 1

Office Address Wichita, Kansas

Character of Well (Completed as Oil, Gas or Dry Hole) dry hole

Date, well completed Aug. 4 1934

Application for plugging filed Aug. 4 1934

Application for plugging approved Aug. 4 1934

Plugging Commenced Aug. 4 1934


Plugging Completed Aug. 4 1934

Reason for abandonment of well or producing formation no oil

If a producing well is abandoned, date of last production 193

Was permission obtained from the Conservation Division or its agents before plugging was commenced?
yes

NORTH

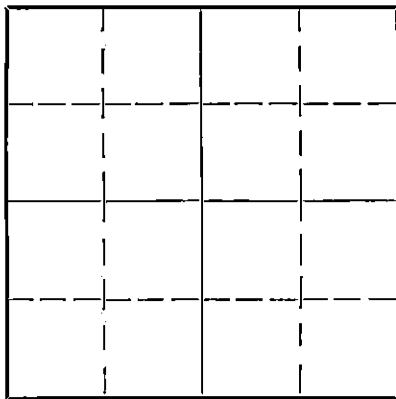

Locate well correctly on above
Section Plat

Name of Conservation Agent who supervised plugging of this well Alexander

Producing formation Depth to top Bottom Total Depth of Well 3383 Feet

Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Arbuckle	water	3341	3383	10"	137'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from... feet to ... feet for each plug set.

Heavy mud 3383 to 137
hole bridged 137' cement 137-112'
heavy mud 112' to 30'
hole bridged 30'
cement 30-10' to base of cellar

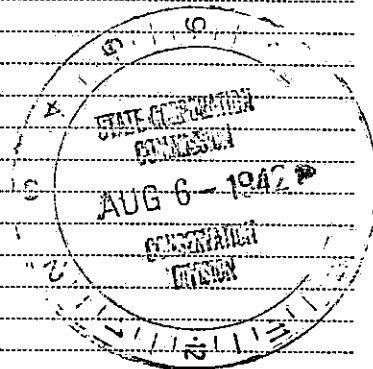

FILE SEC 14 TWP 17 R 12 W
BOOK PAGE 46 LINE 20

(If additional description is necessary use BACK of this sheet)

Correspondence regarding this well should be addressed to Lauck & Moncrief
Address Wichita, Kans

STATE OF Kansas, COUNTY OF Sedgwick, ss.
E. C. Moncrief (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) E C Moncrief
Wichita, Kansas

(Address)

SUBSCRIBED AND SWORN TO before me this 6th day of August, 1934

My commission expires Sept. 14, 1943

Elizabeth Gay
Notary Public

15,009.01353.00.00

LAUCK & HONORIEF et.al,

#1 Ficker

Sec. 14-17-12W
Barton County, Kansas

NEc SE SW

Commenced July 22, 1942

Completed Aug. 4, 1942

Casing: 10" 137' cemented 120 sacks

Surface	15
Sand & shale	100
Red rock & shells	150
red rock & shale	220
red rock	240
shale & shells	725
Anhydrite	750
Shale & shells	1180
salt & shale	1380
broken lime	1615
shale	1650
lime & shale	1735
sand	1790
lime	1870
shale	1920
broken lime	2065
lime & shale	2155
broken lime	2210
shale & shells	2255
shale & lime	2355
shale & shells	2465
shale	2485
broken lime	2575
shale & shells	2629
shale	2650
lime & shale	2800
lime	2963
shale & lime	2965
shale	3065
lime	3165
lime porous	3174
lime	3315
sandy conglomerate	3328
cherty conglomerate	3342
lime (Arbuckle)	3352
Lime Arbuckle soft, (cored) water (10' recovery)	3363
Lime	3384

D & A

Tops Derrick Floor

Lansing	3064
Sandy Conglomerate	3314
Cherty Conglomerate	3327
Arbuckle	3341
Total Depth	3383

FILED
AUG 14 17-14W
BOOK PAGE 46 20

