

WELL PLUGGING RECORD

FORMATION PLUGGING RECORD

Strike out upper line when reporting plugging off formations.

NORTH

A 5x5 grid with a central dot labeled '21'.

Barton County. Sec. 21 Twp. 16S Rge. (E) 13 (W)
Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines. SW NW SE
Lease Owner. The Derby Oil Company, et al
Lease Name. Brinson Well No. I
Office Address. 358 No. Broadway - Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole
Date well completed. 4 - 10 19 45
Application for plugging filed. 4 - 10 19 45
Application for plugging approved. 4 - 10 19 45
Plugging commenced. 4 - 10 19 45
Plugging completed. 4 - 10 19 45
Reason for abandonment of well or producing formation. Dry hole
If a producing well is abandoned, date of last production. 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well..... Ruel E. Durkee - McPherson, Kansas.....
Producing formation..... Depth to top..... Bottom..... Total Depth of Well..... 3509..... Feet
Show depth and thickness of all water, oil and gas formations.

CASING RECORD

[illegible]

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed; from _____ feet to _____ feet for each plug set.

Filled hole with mud from 3509' to 260'

Set plug at 260' with 15 sacks

Filled hole with mud from 260 to 40'

Set plug at 40' and cemented on top of plug with 10 sacks to within 6' of top

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to..... **Bridgeport Oil Company, Inc.**
Address..... **918 Central Building - Wichita 2, Kansas.**

STATE OF Kansas, COUNTY OF Sedgewick.

.....Frank Leach..... (employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-
described well as filed and that the same are true and correct. So help me God.  

(Signature)

Wichita, Kansas

(Address)

SUBSCRIBED AND SWORN TO before me this 16th day of April, 19 45

My commission expires: Oct 29 1947

Notary Public.

15.009.01330.00.00

BRIDGEPORT OIL COMPANY, INC.
918 Central Building,
Wichita 2, Kansas.

Owner-----Derby Oil Company, et al

Well Log-----Brinson #1
SW NW SE 21-16S-13W
Barton County, Kansas


Elevation-----1958' I&S

Date Started----3-26-45

Date Completed--4-10-45

Rotary Tools----0 to 3509'

Casing Record-----
8-3/4" casing cemented @ 264'
with 130 sacks.

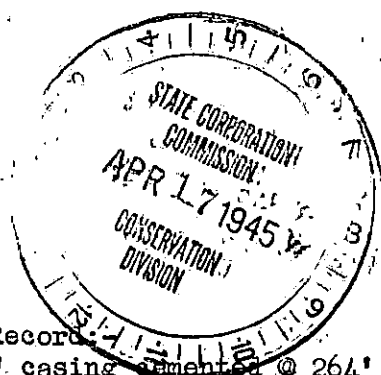

LOG

0	85	Sand Stone
85	145	Shale & Lime Shells
145	165	Sand Stone & Shale
165	264	Shale & Shells
264	290	Shale
290	305	Sand
305	510	Shale & Red Bed
510	680	Shale & Streaks of Sand
680	880	Shale & Shells & Red Bed
880	895	Shale & Lime
895	920	Anhydrite Lime
920	1075	Shale & Shells
1075	1295	Shale & Lime Shells
1295	1305	Shale & Shells
1305	1325	Sand & Pyrite Iron
1325	1350	Shale
1350	1555	Salt & Lime Shells
1555	1740	Shale & Lime Shells
1740	1760	Shale & Shells
1760	1800	Lime
1800	1870	Shale & Shells
1870	2250	Lime & Shale
2250	2330	Shale & Lime
2330	2410	Lime & Shale
2410	2420	Lime-Sandy
2420	2480	Lime & Shale
2480	2575	Shale & Lime Shells
2575	2725	Lime & Shale
2725	2780	Lime
2780	2820	Broken Lime & Shale
2820	2890	Lime & Shale
2890	3120	Lime
3120	3145	Shale
3145	3190	Shale & Streaks of Lime
3190	3423	Lime
3423	3463	Lime & Shale
3463	3509	Lime
3509		T.D.
		Plugged & Abandoned 4-10-45

FORMATION TOPS - D.F.

Top Anhydrite	895'
Top Heebner	3104'
Top Toronto	3120'
Top Brown Lime	3185'
Top Lansing	3197'
Top Conglomerate	3442'
Top Arbuckle	3464'

I, Frank Leach, do hereby certify
that the above log is correct to the
best of my knowledge and belief.

BRIDGEPORT OIL COMPANY, INC.

By: Frank Leach

21 16 13W
10 9