


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

15.009.00248.00.00
WELL PLUGGING RECORD

NORTH

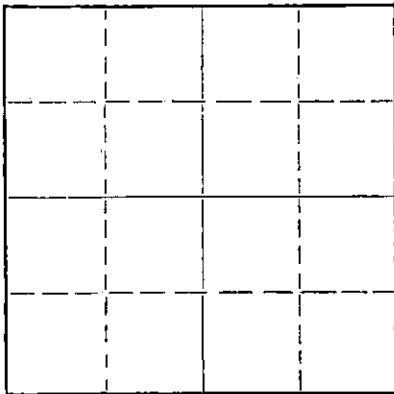

Locate well correctly on above
Section Plat

Barton County, Sec. 19 Twp. 16 Rge. 12 (E) W (W)
Location as "NE/CNW/SW" or footage from lines SW SW NW
Lease Owner John O. Farmer, Inc.
Lease Name Reiff #1 Well No. _____
Office Address Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 5-9-60 _____ 19____
Plugging completed 5-11-60 _____ 19____
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Don Truan
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3446 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	307'	none
				5-1/2"	3446'	2883'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Checked the hole to 3432' and found it open.
Filled w/sand to 3400' and dumped 5 sacks of
cement with bailer. Pulled 5 1/2" casing.
Cleared hole and mudded the hole to 300',
set rock bridge to 290' and dumped 25 sacks
of cement. Mudded the hole to 40', set rock
bridge to 30' and ran 10 sacks of cement to
base of cellar.

RECEIVED
STATE CORPORATION COMMISSION

PLUGGING COMPLETED

MAY 17 1960

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Knight Casing Pulling Co.
Address Chase, Kansas

STATE OF KANSAS, COUNTY OF RICE, ss.
I, Noel J. Knight (employee of owner) or (owner or operator) of the above-described
well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the
above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel Knight
Chase, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 13th day of May, 19 60.

My commission expires 9-27-62

Thomas V. Dwyer
Notary Public.



15.009.00248.00.00

WELL LOG

Reif # 1

SW SW NW 19-16S-12W

Barton County, Kansas

FORMATION TOPS:

0 - 310	Surface Clay, Shale, Post Rock	Heebner	3064
310 - 385	Shale	Toronto	3081
385 - 400	Pyrite & Sand	B Lime	3152
400 - 865	Shale, Red Bed	Kansas City	3158
865 - 900	Anhydrite	Arbuckle	3417
900 - 1300	Shale & Shells		
1300 - 1490	Salt		
1490 - 1635	Shale & Lime		
1635 - 1915	Lime & Shale		
1915 - 2675	Shale & Lime		
2675 - 3160	Lime & Shale		
3160 - 3419	Lime		
3419 - 3450	Arbuckle		
3450	T. D.		


STATE OF KANSAS

COUNTY OF BARTON ss

T. D. Sweetman, partner of S & S Drilling Company, being first duly sworn on oath says: That I have knowledge of the facts, statements and matters herein contained and the log of the above described well as filed and that the same are true and correct.


T. D. Sweetman

Subscribed and sworn before me this 4th day of December, 1959.


Notary Public, Barton County

My Commission expires 4-27-61