


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

15.159.00098-0000

WELL PLUGGING RECORD

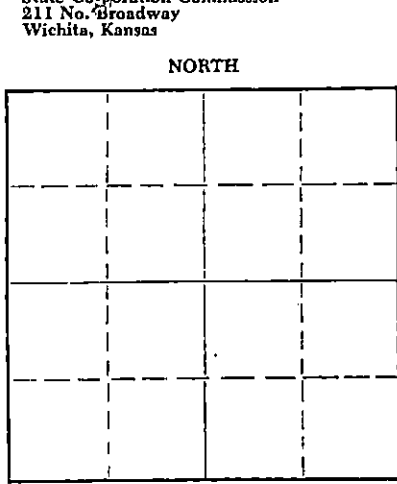

Locate well correctly on above Section Plat

RICE County. Sec. 9 Twp. 21 Rge. 10W (E) (W)
Location as "NE/CNW/SW" or footage from lines SW SW SE
Lease Owner SANTA FE PIPE & SUPPLY
Lease Name HAMILTON Well No. 1
Office Address P. O. BOX 562 - GREAT BEND, KANSAS
Character of Well (completed as Oil, Gas or Dry Hole) OIL
Date well completed NOVEMBER 29, 1952
Application for plugging filed MARCH 28, 1962
Application for plugging approved APRIL 2, 1962
Plugging commenced MARCH 30, 1962
Plugging completed APRIL 5, 1962
Reason for abandonment of well or producing formation DEPLETED

If a producing well is abandoned, date of last production 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

Name of Conservation Agent who supervised plugging of this well CECIL JONES
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3395 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				10 3/4	200'	NONE
				7"	3392'	2419'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

3395' - 3380' SAND
3380' - 3360' 5 SACKS CEMENT
3360' - 207' MUD
207' - 190' ROCK BRIDGE
190' - 120' 35 SACKS CEMENT
120' - 25' MUD
25' - BASE ROCK BRIDGE AND 10 SACKS CEMENT

RECEIVED
STATE CORPORATION COMMISSION

JUL 30 1962

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor GLENN & SMITH PIPE PULLING COMPANY
Address P. O. BOX 114 - ELLINWOOD, KANSAS

STATE OF Kansas COUNTY OF Barton, ss.
Santa Fe Pipe & Supply (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
P. O. Box 562 - Great Bend, Kans.
(Address)

SUBSCRIBED AND SWORN to before me this 26 day of July, 1962
Carmen Reinhardt Leiker
Carmen Reinhardt Leiker Notary Public.

My commission expires Jan. 26, 1963



COPY


15.159.00098-0000
WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas

Company-SCHERMERHORN OIL CORPORATION
Farm-Hamilton No. 1

SEC. 9 T. 21 R.10W
SW SW SE

Total Depth. 3395
Comm. 11-16-52 Comp. 11-29-52
Shot or Treated.
Contractor. Garvey Drilling Co.
Issued. 2-7-53

County Rice
KANSAS



Elevation. 1721

Production. 408 bbls.

CASING:

10 3/4 200' w/ 250 sx cement
7" 3392'

Figures Indicate Bottom of Formations.

sand	95
red bed & sand	243
red bed	340
red bed & shale	360
anhydrite	390
shale & shells	1240
lime & shale	2750
lime	2823
shale & lime	2896
lime	3347
shale	3389
lime	3395
Total Depth	

TOPS:

Heebner	2850
Brown lime	2984
Lansing	3007
Simpson	3336
Arbuckle	3391

RECEIVED
STATE CORPORATION COMMISSION
JUL 30 1962
CONSERVATION DIVISION
Wichita, Kansas