

16.009.01317.00.00

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

OR
FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging off formations.

NORTH

Locate well correctly on above
Section Plat

Barton County. Sec. 1 Twp. 17 Rge. 11 (E) 11 (W)
Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines SE SE NE
Lease Owner. Joseph Z. Zajic - Three Way Drilling Co et al
Lease Name. do Well No. 1
Office Address. 607-10 Union Natl Bank Bldg, Wichita, Kansas.
Character of Well (completed as Oil, Gas or Dry Hole) dry
Date well completed 2-20-45 19.
Application for plugging filed 2-20-45 19.
Application for plugging approved 2-21-45 19.
Plugging commenced 2-24-45 19.
Plugging completed 2-26-45 19.
Reason for abandonment of well or producing formation dry

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? yes

Name of Conservation Agent who supervised plugging of this well _____
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3415 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8 $\frac{1}{2}$ "	210	cemented

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from 205 feet to 6' from top feet for each plug set.

Hole filled with mud to 210 feet from top
Plug set at 205 feet - 10 sax cement on plug, wooden plug
Mudded to 6 feet of top
Five sax cement on top of plug

FILE 1-17-11W
6-1

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Three Way Drilling Company
Address 607-10 Union Natl Bank Bldg, Wichita, Kansas.


STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
H. W. Lewis (partner) (employee of owner) or (owner or operator) of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God. THREE WAY DRILLING COMPANY,

(Signature) BY [Signature]
607-10 Union Natl Bank Bldg, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 26th day of March

My commission expires 2-5-49

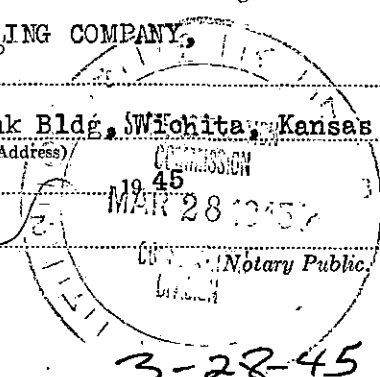

3-28-45

15.009.01317.00.00


WELL LOG BUREAU — KANSAS GEOLOGICAL SOCIETY
412 Union National Bk. Bldg., Wichita, Kansas

Company - THREE-WAY DRIG.CO., ET AL
Farm - Zajic No. 1

SEC. 1 T. 17 R. 11 W
SEc NE

Total Depth. 3415'
Comm. 2-4-45 Comp. 2-20-45
Shot or Treated.
Contractor. Three-Way Drig.Co.
Issued. 3-3-45

County. Barton
KANSAS



CASING:
8 1/4" 210' Cem.

Elevation. _____

Production. Dry

Figures Indicate Bottom of Formations.

shale	258
shale & shells	550
shale & red rock	720
anhydrite	750
shale	755
shale & shells	1189
salt	1446
lime-shale	1695
lime	1783
lime & shale	1863
lime	1920
shale	1941
lime-shale	2295
shale & shells	2465
shale & lime	2554
shale & shells	2641
lime	2855
no log	2876
lime	2925
lime-shale	2946
shale & shells	3004
lime	3012 ?
lime & shale	3006 ?
shale	3058
lime	3108
break sft	3113
lime	3175
lime & shale	3244
lime	3286
lime & shale	3336
no log	3362
lime	3368
congl. cherty	3391
lime	3415
Total Depth.	

Tops:	
Anhydrite	720
Topeka	2683
Lans-K.C.	3058
porous zone 3162-87	
very porous, no shows	
porous zone 3255-72	
very porous, no shows	
Conglomerate	3367
Arbuckle Dolo.	3384
porous 3397-3412, no show	

16 17 11W
1