

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

OR

Strike out upper line
when reporting plugging
of formations.

FORMATION PLUGGING RECORD

Barton County, Sec. 3 Twp. 16 Rge. 12 ~~(E)~~ (W)

Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines C - NE $\frac{1}{4}$ SE $\frac{1}{2}$

Lease Owner The Koch Engineering Company

Lease Name Polzin Well No. 1

Office Address 335 W. Lewis Street, Wichita, 2 - Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed January 31, 19 44

Application for plugging filed January 31, 19 44

Application for plugging approved January 31, 19 44

Plugging commenced January 31, 19 44

Plugging completed January 31, 19 44

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production - 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well C. T. Alexander

Producing formation Arbuckle Depth to top 3,380 Bottom 3,380 Total Depth of Well 3,380 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Arbuckle	Dry	3,350'	3,380'	8-5/8	300'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

The hole was filled with heavy mud from 3,380' to 300'

A bridging plug was set at 300', and cemented to 270'. The hole was bridged again at 26' and 20' of cement placed in surface pipe, and filled up to top with mud.

PLUGGING
FILE NO. 3-16-12W
BOOK PAGE 107-9

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to The Koch Engineering Company

Address 335 West Lewis Street, Wichita 2 - Kansas

STATE OF OKLAHOMA COUNTY OF TULSA

Amille Harber (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

Amille Harber
MAR 8 1944

(Address)

SUBSCRIBED AND SWORN to before me this 7th day of March, 19 44

My commission expires Oct. 19, 1945

My commission expires

Notary Public.

15.009.01346.00.00

COMPANY: Winkler-Koch Engineering Co. LOCATION: Polzin ✓
 CONTRACTOR: Parker-Duerr Drilling Co. C $\frac{1}{4}$ NE SE
 COMMENCED: Dec. 7, 1943 Sec. 3-16-12,
 COMPLETED: Jan. 31, 1943 Barton County, Kansas
 PRODUCTION: Dry


CASING RECORD

300' 8 5/8" Surface Pipe

Figures Indicate Bottoms of Formations

Shale & Shells	300
Shale & Shells - Red Bed	815
Shale & Lime Shells	930
Salt, Shale & Shells	1,240
Shale	1,487
Shale & Shells	1,690
Shale & Salt	1,860
Shale & Lime Shells	1,870
Red Rock & Lime	1,892
Lime	1,960
Shale & Lime Shells	2,009
Lime & Shale	2,274
Shale & Lime Shells	2,406
Shells	2,489
Shale	2,520
Shale & Lime Shell	2,733
Lime	2,750
Shale	2,806
Shale & Shells	2,811
Lime	3,009
Soft Lime	3,033
Lime	3,096
Lime Break	3,100
Lime	3,166
Lime Shells	3,167
Lime	3,380 T.D.

NOTE: Surface elevation 1,890'
 Tops: Dodge 2,980'
 Kansas City 3,057'
 Arbuckle 3,368'

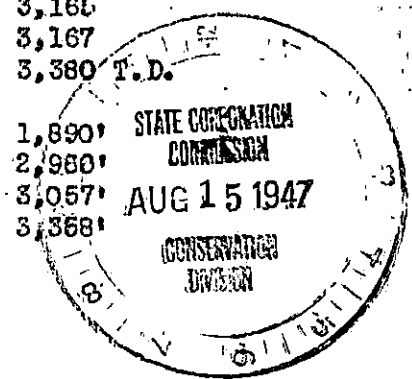

I hereby certify this to be a correct and accurate log of the above described well as shown by the drilling reports.

Subscribed and sworn to before me this _____ day of February, 1944.

Notary Public

PLUGGING
 FILE SEC-3 T-16 R-12W
 BOOK PAGE 107 LINE 9