


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

NORTH

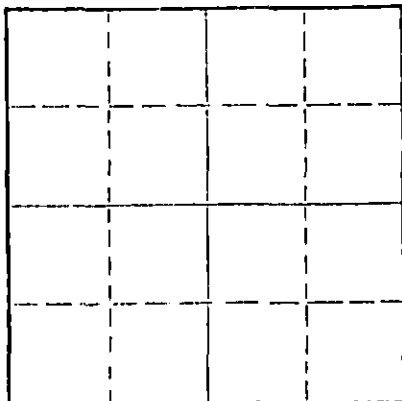

Locate well correctly on above
Section Plat

Barton County, Sec. 13 Twp. 16S Rge. 12 (E) (W) X

Location as "NE/CNW/SW" or footage from lines Center of WL NE SE

Lease Owner N. C. R. A.

Lease Name A. Hoffman Well No. A-2

Office Address P. O. Box 6 Great Bend, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) _____

Date well completed _____ 19____

Application for plugging filed _____ 19____

Application for plugging approved _____ 19____

Plugging commenced 2-7-67 _____ 19____

Plugging completed 2-11-67 _____ 19____

Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19____

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Donald Truan

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3366 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				10	737	None
				5 1/2	None	1025

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Moved in.

Rigged up unit. Dug out cellar. Sanded back from 3366' to 3340'. Mixed and dumped 5 sacks of cement on bridge. Rigged up jacks - took tension - had 19" on 20 joints.

Shot pipe at 3128'. Working pipe - had 35" stretch.

Working pipe - had 66 1/2" tension. Shot pipe at 3008' - 2500' - 2214' 2011' 2008' and 1000'. Pulling pipe.

Pulling pipe.

Mudded back hole to 400'. Set 50' rock bridge to 350'. Dumped 6 yards of Redi Mix cement on bridge to top of surface.

15-009-15756-0000
STATE CORPORATION COMMISSION
FEB 27 1967
CONSERVATION DIVISION
WICHITA, KANSAS

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Forbes Casing Pulling, Inc.

Address P. O. Box 221 Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.

J. O. Forbes (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. O. Forbes

P. O. Box 221 Great Bend, Kansas

(Address)

SUBSCRIBED AND SWORN TO before me this 16 day of February 1967

[Signature]
Notary Public.

My commission expires May 27, 1969