


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

15-009-07256-0000
WELL PLUGGING RECORD

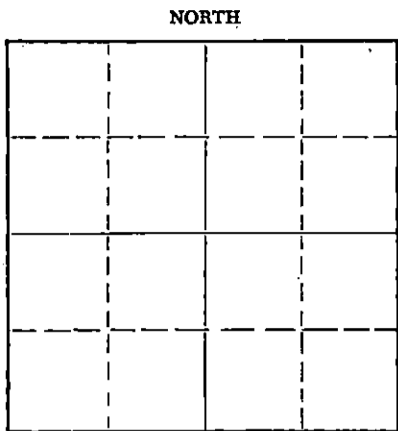

Location as "NE/CNW/SW" or footage from lines located 9901 from S. line, 9901 E.
 Barton County, Sec 13 Twp 16S Rge 12W (E) (W)
 Lease Owner Phillips Pet. Co.-Morton Spector Line 11/4
 Lease Name Weber Well No. 4
 Office Address Great Bend-Russell, Kansas
 Character of Well (completed as Oil, Gas or Dry Hole) Oil Well
 Date well completed June 1947
 Application for plugging filed August 21 1954
 Application for plugging approved August 24 1954
 Plugging commenced September 9 1954
 Plugging completed September 14th 1954
 Reason for abandonment of well or producing formation not commercially profitable

If a producing well is abandoned, date of last production May 7th 1959
 Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Warren H. Horner
 Producing formation Arbuckle Depth to top 3318' Bottom 3325' Total Depth of Well 3325' Feet
 Show depth and thickness of all water, oil and gas formations. 5 1/2" casing perforated 3236-42, 3215-21, 3125-24, 3085-94, and 3057-65

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	779.44'	None
				5 1/2"	3325'	2311'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

3057 to 3040 ft.	sand bridge
3040 to 3010 ft.	5 sks. cement
3010 to 250 ft.	mudded
250 to 240 ft.	rock bridge
240 to 180 ft.	20 sacks cement
180 to 30 ft.	mud
30 ft. to cellar	10 sacks cement

STATE OF KANSAS
 SEP 25 1954
 09-25-54

Name of Plugging Contractor Ray Ash
 Address Ellinwood, Kansas

STATE OF Kansas, COUNTY OF ~~KANSAS~~ Russell, ss.
 Morton Spector (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *Morton Spector*

SUBSCRIBED AND SWORN TO before me this 23rd day of September, 1954

(Address) *W. N. Clawson*
 Notary Public.

My commission expires March 9, 1958

PLUGGING
 FILE SEC 13T 16S 12W
 BOX PAGE 57 LINE 22

EXPLORATION RECORD

Lease Weber

Well 4

Formation Name	Top	Base	Remarks
Surface clay and sand	0	140	
Shale	140	275	
Lime	275	320	
Sand	320	380	
Red Bed and shells	380	435	
Shale, lime and shells	435	610	
Red Bed and shale	610	742	
Anhydrite	742	784	
Lime and shale	784	1065	
Shale and salt	1065	1425	
Shale, lime and shells	1425	1545	
Shale	1545	1560	
Lime and sand	1560	1645	
Lime and shale	1645	1795	
Shale	1795	1820	
Lime	1820	2035	
Lime and shale	2035	2165	
Shale, lime, and shells	2165	2325	
Lime and shale	2325	2440	
Lime, shale, and shells	2440	2515	
Lime	2515	2530	
Shale	2530	2635	
Lime and shale	2635	2678	
Lime	2678	2729	
Lime, shale, and shells	2729	2791	
Lime	2791	2864	
Lime, shale, and shells	2864	2936	
Lime and shale	2936	3124	
Lime	3124	3171	
Lime and shale	3171	3221	
Broken lime and shale	3221	3263	
Lime	3263	3293	
Lime and shale	3293	3319	
Shale	3319	3322	
Lime	3322	3328	

FORMATION TOPS:

Anhydrite	742
Heebner	2946
Toronto	2959
Brown Lime	3035
LKC	3048
Arbuckle	3325

PLUGGING

FILE SEC. 137/16 R 1241

BOOK PAGE 58 LINE 22

NOV 10 1953