


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

NORTH

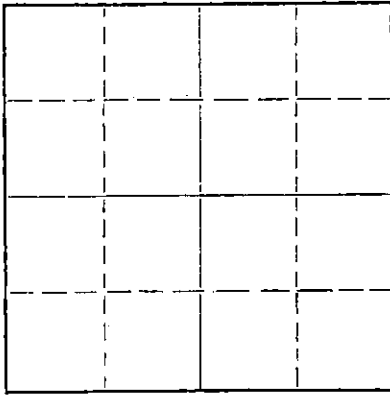

Locate well correctly on above
Section Plat

Location as "NE/CNWxSWx" or footage from lines Barton County. Sec. 13 Twp. 16 Rge. 12 (E) (W)
Lease Owner Specter Pipe & Supply, Inc.
Lease Name Hoffman A Well No. 3
Office Address Box 169, Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) oil
Date well completed 8-24-44 19
Application for plugging filed 6-10-68 19
Application for plugging approved 6-11-68 19
Plugging commenced 7-1 19 68
Plugging completed 7-20 19 68
Reason for abandonment of well or producing formation Depleted

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Don Truan
Producing formation arbuckle Depth to top 3310' Bottom 3318' Total Depth of Well 3331 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	242'	none
				5 1/2"	3318'	1908.53'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged back to 3000ft. with sand
Pumped 5 sacks of cement;
Pumped 15 sacks of mud;
90 sacks of cement to top.

RECEIVED
STATE CORPORATION COMMISSION
JUL 29 1968
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Lynch Casing Pulling Co.
Address RR34 Great Bend, Kansas

STATE OF Kansas, COUNTY OF Russell, ss.
Specter Pipe & Supply, Inc. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
Russell, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 25th day of July, 1968

My commission expires May 31, 1971

Wilsons M. Lindahl
Notary Public.

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
412 Union National Bk. Bldg., Wichita, Kansas


COPY

Company - BLACK-MARSHALL OIL CO.
Farm - A. Hoffman No. 3

SEC. 13 7.16 R. 12 W
NE SW SE

Total Depth. 3331'
Comm. 8-12-44 Comp. 8-24-44
Shot or Treated.
Contractor. Hannum Drilling Co.
Issued. 10-14-44

County. Barton
KANSAS



Elevation. _____

Production. Pot. 1358 B.

CASING:

8 5/8" 242' Cem.
5 1/2" 3318' Cem. GL

Figures Indicate Bottom of Formations.

shale & shells	187
shale brkn & sand	230
shale & shells	490
sand, iron & red bed	625
shale & shells	750
anhydrite	785
shale & shells	1215
salt	1410
shale & shells	1440
lime brkn	1640
shale & lime shells	1750
lime brkn & sand	1900
shale & lime shells	2343
shale	2519
shale & lime shells	2650
lime brkn	2740
lime	3328
TD Rotary Meas.	
lime	3331
Total Depth	

Topo:

Topeka ?	2680
Heebner	2969
Lansing wh	3060
Ooolitic	3145-69 no shows
Base KC	3310
Arbuckle	3323-28

RECEIVED
STATE CORPORATION COMMISSION
JUN 1 1 1968
CONSERVATION DIVISION
Wichita, Kansas