


STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
P. O. BOX 17027  
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

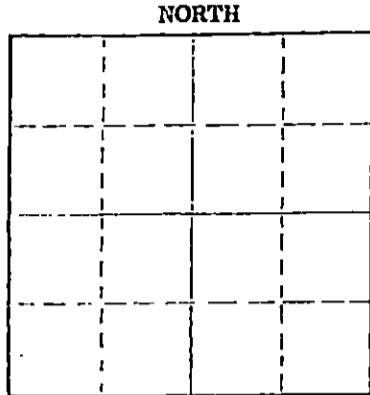

Locate well correctly on above Section Plat

Rice County. Sec. 27 Twp. 21 Rge. 8 (E) (W)  
Location as "NE/CNW/SE/SW" or footage from lines. C SW NE  
Lease Owner Sterling Drilling Company  
Lease Name Mathes #1 Well No.  
Office Address Sterling, Kansas 67579  
Character of Well (completed as Oil, Gas or Dry Hole)  
Date well completed 19  
Application for plugging filed 19  
Application for plugging approved 19  
Plugging commenced 1/17/75 19  
Plugging completed 1/22/75 19  
Reason for abandonment of well or producing formation depleted.  
If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Scott  
Producing formation Depth to top Bottom Total Depth of Well 3382 feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	232	none
				4 1/2"	3378	2808'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Halliburton pumped 25 sacks cement on bottom, stopped plug at 3100'.  
Shot pipe at 2931', 2837', pulled 87 joints. Set rock bridge at 230  
to 220' and dumped 25 sacks cement. Mud to 40', 10' rock bridge and  
ran 10 sacks cement.

PLUGGING COMPLETE.

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor KELSO CASING PULLING  
Address CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE  
R. DARRELL KELSO (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. Darrell Kelso  
CHASE, KANSAS

Subscribed and Sworn to before me this 31st day of January, 1975

My commission expires  
MARGARET MELCHER  
NOTARY PUBLIC  
Rice County, Kansas  
My Commission Expires  
Feb. 15, 1975

Margaret Melcher  
Notary Public.

RECEIVED  
STATE CORPORATION COMMISSION  
JAN 5 1975  
CONSERVATION DIVISION  
Wichita, Kansas  
2-5-75

STENCILED

JAN 20 1968

KANSAS GEOLOGICAL SOCIETY  
KANSAS WELL LOG BUREAU - KANSAS WELL SAMPLE BUREAU  
KANSAS GEOLOGICAL SOCIETY BUILDING  
508 EAST MURDOCK - WICHITA, KANSAS

ORIGINAL

15.159.30371-0000

COMPANY TRIPLE D" DRILLING

SEC. 27 T. 21 R. 8W

FARM Mathes NO. 1

LOC. CSW NE

TOTAL DEPTH 3382'

COUNTY Rice

COMM. 3-16-66


COMP. 6-13-66

KANSAS

SHOT OR TREATED

CONTRACTOR Northeastern Pet.

ISSUED 1-20-68



CASING

20 10  
15 8 " 232' cell w/ 100 sx  
12 6  
13 5  
4" 3380'

ELEVATION 1636' KB

PRODUCTION EST 20 BOPD  
MISS 3300-09

FIGURES INDICATE BOTTOM OF FORMATIONS

COMPLETE DRILLERS LOG NOT AVAILABLE

TOPS: LOG

Heebner 2744  
Douglas sand 2778  
Brown lime 2894  
Lansing 2932  
Mississippi 3301  
LTD 3376  
RTD 3382

RECEIVED  
STATE CORPORATION COMMISSION  
DEC 12 1974  
CONSERVATION DIVISION  
Wichita, Kansas