


STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

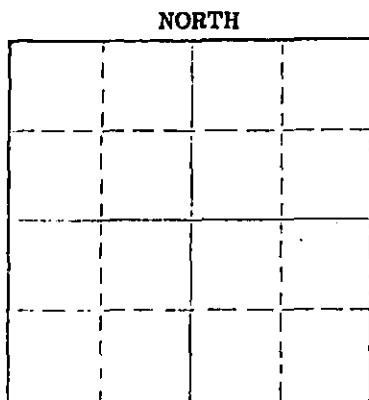

Locate well correctly on above Section Plot

Rice County. Sec. 24 Twp. 21⁵ Rge. 8^W (E) (W)
Location as "NE/CNW/SE" or footage from lines 100' N 5252
Lease Owner DUNBAR DRILLING INC
Lease Name COUSE Well No. 2
Office Address 5252 N. Broadway Wichita
Character of Well (completed as Oil, Gas or Dry Hole) OIL
Date well completed _____ 19____
Application for plugging filed 2/14/75 19____
Application for plugging approved 2/19/75 19____
Plugging commenced 2/19/75 19____
Plugging completed _____ 19____
Reason for abandonment of well or producing formation Depleted

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

Name of Conservation Agent who supervised plugging of this well GILBERT TOMAN
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3403 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Sand back to 3300 + dump 5 bag
Cement shot pipe @ 3143-3018-2944-2899
Rock bridge from 200' to 215' dump 35 bag
Cement mud back with 15 bag cement cap

Name of Plugging Contractor DUNBAR DRILLING INC
Address 5252 N. Broadway Wichita Kansas


STATE OF KANSAS COUNTY OF SEDGWICK _____ 53.

_____, (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W.P. Simmons
5252 North Broadway, Wichita, Kansas 67219

Subscribed and sworn to before me this 8th day of July 1975

My commission expires November 19, 1977
Frances J. Simmons Notary Public.



RECEIVED
STATE CORPORATION COMMISSION
JUL 9 1975
CONSERVATION DIVISION
Wichita, Kansas

RECEIVED
STATE CORPORATION COMMISSION

FEB 18 1975

CONSERVATION DIVISION
W. Wayne Kane
2W Kane
100 ft. N. SE SE Sec. 4-21-8w
Rice County, KansasGEOLOGICAL REPORT

Contractor: Wofford Drlg. Co.
Commenced: December 7, 1970
Completed: December 15, 1970

Woco Inc., # 2W Kane
100 ft. N. SE SE Sec. 4-21-8w
Rice County, Kansas

Gentlemen:

Following is the geological report on the above captioned well. Samples were examined from 3000' to total depth. Measurements were taken from the Kelly Bushing.

Elevation: 1622' K.B. 1617' G.L.
Surface Pipe: 8 5/8" @ 194 ft.
Drillstem Tests: None
Electric Logs: None
Production Pipe: 5 1/2" @ 3402 feet with 75 sacks.

Formation SummaryLansing-Kansas City 2941 (-1319)

There were no well developed zones of porosity and no shows present in this section.

Conglomerate 3369 (-1747)

- 3369 - 3381 Various colored shales and small amount of chert, no shows.
3381 - 3385 Sandstone; gray, angular, quartzitic, limey in part, no shows, trace of chert.

Mississippian 3391 (-1769)

- 3391 - 3398 Limey and shaley fresh and sharp chert, no apparent shows.
3398 - 3403 Chert; white, tan fresh to slightly weathered, spotted pinpoint porosity, scattered light stain, slight show of free oil, no odor.

Rotary Total Depth 3403 feet.

Production pipe was set one foot off bottom and the well will be tested by means of cable tools.

Very truly yours,

Lee Poulsen

Lee Poulsen