


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Rice County, Sec. 11 Twp. 21S Rge. 8W E/W
Location as "NE/CNW 1/4 SW 1/4" or footage from lines
C of SW NE
Lease Owner Sanders Oil Company
Lease Name Gibson #1 Well No.
Office Address 910 Sutton Place, Wichita, Ks 67202
Character of Well (Completed as Oil, Gas or Dry Hole)

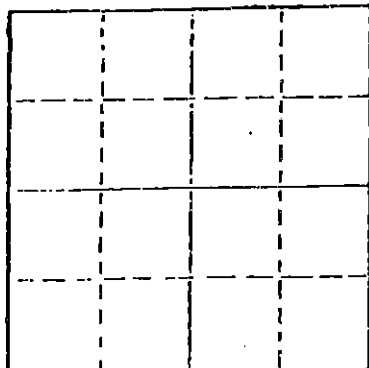

Locate well correctly on above
Section Plot

Date Well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced 10/31/80 19
Plugging completed 10/31/80 19
Reason for abandonment of well or producing formation
Depleted

If a producing well is abandoned, date of last production 19.

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Toman
Producing formation Depth to top Bottom Total Depth of Well 3679'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	229	None
				4-1/2"	3407	2835'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid
was placed and the method or methods used in introducing it into the hold. If cement or other
plugs were used, state the character of same and depth placed, from feet to
feet for each plug set.

Squeezed hole with 3 sacks hulls and 20 sacks gel. Released plug and displaced
with 85 sacks 50/50 pos, 2% gel.

Plugging complete.

RECEIVED
STATE CORPORATION COMMISSION
NOV - 6 1980

CONSERVATION DIVISION
Wichita, Kansas

11-6-80


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KELSO CASING PULLING
CHASE, KANSAS

STATE OF Kansas COUNTY OF Rice, ss.
R. Darrell Kelso (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
as filed and that the same are true and correct. So help me God.

(Signature) R. Darrell Kelso
Chase, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 4th day of November, 19 80



My commission expires

Joan Kelso
Notary Public.

DRILLERS' WELL LOG

DATE COMMENCED: March 25, 1979
 DATE COMPLETED: April 2, 1979

Sanders Oil Co.
 Gibson # 1
 C SW NE
 Sec. 11-T21S-R8W
 Rice County, Ks.

ELEVATION: 1640 K.B.

0 - 95' Sand
 95 - 229' Red Bed
 229 - 715' Shale
 715 - 1015' Salt
 1015 - 1353' Shale & Lime
 1353 - 2453' Lime, Shale
 2453 - 2757' Lime
 2757 - 2761' Shale
 2761 - 2778' Lime & Shale
 2778 - 2804' Lime
 2804 - 2902' Shale
 2902 - 2938' Lime & Shale
 2938 - 3260' Lime
 3260 - 3324' Lime & Shale, Chert
 3324 - 3370' Chert & Lime
 3370 - 3606' Shale
 3606 - 3655' Chert
 3655 - 3679' Sand, Shale
 3679' RTD

FORMATION DATA

Ft. Riley 1353
 Topeka 2453
 Heebner 2757
 Toronto 2778
 Douglas 2804
 Br. Lime 2902
 Lansing (KC.) 2938
 Base K.C. 3260
 Marmaton 3270
 Conglomerate 3313
 Mississippi 3324
 Kinderhook 3370
 Viola 3606
 Simpson Sd 3655
 RTD 3679

SURFACE PIPE: Set
 used 8 5/8" pipe @
 229' w/175 sacks
 60/40 poz., 2% gel.
 and 3% c.c.

PRODUCTION PIPE:
 Set new 4 1/2", 9 1/2", @
 3407' w/125 sacks
 60/40 pozmix w/last
 30 sacks w/latex

RECEIVED
 STATE CORPORATION COMMISSION

JUL 31 1980

CONSERVATION DIVISION
 Wichita, Kansas

A F F I D A V I T

State of Kansas
 County of Barton) ss.

Bill Draney, of lawful age does swear and state that the facts and
 statements herein contained are true and correct to the best of his knowledge.

Bill Draney

Subscribed and sworn to before me this 2 day of April 1979

Charles M. Hargreaves
 Notary Public

My Comm. Expires: April 11, 1982

