
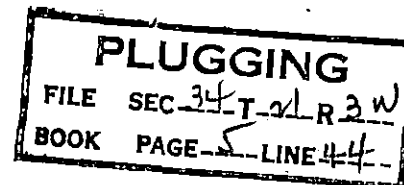


LARIO OIL & GAS COMPANY
PRODUCERS
CANTON, KANSAS

June 12, 1935

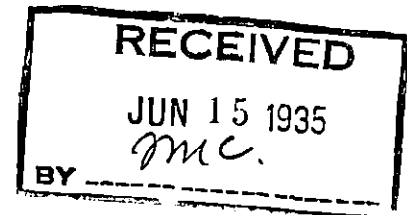

Mr. T.A. Morgan
State Oil Umpire
800 Bitting Bldg.,
Wichita, Kansas

Gentlemen:

We desire to plug our No. 1 well Jos. Krehbiel located in the NW NW SW Section 34, Township 21S, Range 3W McPherson County, Kansas. This well was completed March 13, 1933 and since has dropped off in production that it is no longer a commercial well.

Unless otherwise instructed we will plug the well as follows:

TOTAL DEPTH 3484' (Rotary drilled)
8 $\frac{1}{4}$ " casing set @ 3474'.
Mud the hole to 3474'.
Wooden plug @ 3474'
Mud the hole to 232'
Bridge & cement w/ 15 sacks cement and mud to top. (Will attempt to pull 232' of 15 $\frac{1}{2}$ " Surface pipe.)

A copy of the plugging record will be mailed you upon completion.

Yours very truly,

LARIO OIL & GAS COMPANY

By/ *F.D. Broadwater*
Gen. Supt.,

F.D. Broadwater/c

*approximate
plugging?
note alexander*

Card

(C)

Card

PLUGGING	
FILE	SEC 34-21-3W
BOOK	PAGE 5 LINE 4

June 15, 1935.

No. 1 Jos. Krehbiel
NW NW SW 34-21-3W
McPherson County

Lario Oil & Gas Co.,
Canton, Kansas.

Attention: F. D. Broadwater

Dear Sir:

This letter is your permission to
plug the above subject well, under the
rules and regulations of the State
Corporation Commission.

Please advise Mr. C. T. Alexander,
P. O. Box 410, Mc Pherson, Kansas, tele-
phone---1233, and this office when you
desire to commence plugging operations.

Yours very truly,

T. A. MORGAN, Director

TC:ha

By